



**Recommendation SFCG 22-1R4**

**FREQUENCY ASSIGNMENT GUIDELINES FOR COMMUNICATIONS  
IN THE MARS REGION**

The SFCG,

CONSIDERING

- a) that a regional communication network can be expected in the foreseeable future at Mars as missions to Mars increase in number and variety;
- b) that frequencies for direct communication between a spacecraft at Mars and an Earth station are provided in the existing allocations to the space research service (SRS);
- c) that separate frequencies are needed in the Mars region for compatible local communications between a surface vehicle and an orbiter, between surface vehicles, and between orbiters;
- d) that major criteria for allocating frequencies include RF compatibility, technology availability and performance, operation scenarios, cost to the missions, and ability to conduct testing and emergency support from the Earth;
- e) that, without sufficient frequency separation, a Mars vehicle receiving signals from the Earth can be easily interfered by a signal transmitted by itself or by a local Mars vehicle, and a Mars vehicle transmitting to the Earth can easily interfere with a local receiver;
- f) that lower frequency provides better SNR performance for a communication link between two vehicles using low gain broad beam antennas, such as between a rover and a low orbiter;
- g) that higher frequency provides better performance between two vehicles employing high gain antennas, such as between a large lander and an orbiter with accurately pointed antennas;
- h) that testing Mars local link radios with signals transmitted from an earth station is allowed only if it does not interfere with Earth-based radio systems operating in accordance with

provisions of the Radio Regulations; and that techniques such as self-test on board are available to minimize the need for testing with Earth-based signals;

- i) that the SFCG has resolved to provide assistance to member agencies in coordinating frequency assignment for deep space missions, including missions to Mars (see RES SFCG A21-1);
- j) that Mars missions need interoperable relay links to maintain communication with the Earth; and that such links in the UHF band have been defined in the CCSDS Proximity 1 standard;
- k) that passive observations in space need to be protected to the extent provided in the Radio Regulations, particularly the quiet zone in the shielded area of the Moon;
- l) that some frequency bands recommended for proximity communications in the lunar region<sup>1</sup> could also be used in the Mars region, with the potential benefits of shared technology development and hardware re-use;

#### RECOGNISING

- a) that Mars local links must not interfere with the direct communication links between space and the Earth using frequencies provided in the ITU Radio Regulation;
- b) that multiple frequency bands are needed for missions to meet various communications requirements and satisfy cost, mass and performance objectives;
- c) that Mars proximity links may have the potential to cause interference to Radio Astronomy observatories in the shielded zone of the Moon;
- d) that members, through the SFCG, should work together with IUCAF to exchange planning information for Mars missions in accordance with RES SFCG 23-5;

#### RECOMMENDS

1. that agencies select frequencies from Table 1 for communications in the Mars region according to the specific applicability and precautions recommended in Table 2;
2. that testing Mars local links in flight with signals transmitted from an Earth station be minimized and strictly non-interfering to the Earth-based radio systems operating under the provisions of Radio Regulation;
3. that assignment of Mars local link frequencies be coordinated within the SFCG in accordance with RES A21-1.

---

<sup>1</sup> See REC SFCG 32-2R3 or latest revision

Table 1: Summary of Frequency Bands for Communications in the Mars Region

<b>Link</b>	<b>Frequency</b>
Space-to-Earth:	2290-2300 MHz 8400-8450 MHz 31.8-32.3 GHz 37-37.5 GHz <sup>2</sup>
Earth-to-space :	2110-2120 MHz 7145-7190 MHz 34.2-34.7 GHz 40.0-40.5 GHz
Orbit-to-surface:	435-450 MHz <sup>3</sup> 2025-2110 MHz 2483.5-2500 MHz 7190-7235 MHz 14.5-15.35 GHz 22.55-23.55 GHz
Surface-to-orbit:	390-405 MHz <sup>3</sup> 2200-2300 MHz 8450-8550 MHz <sup>4</sup> 16.6-17.1 GHz 25.5-27.5 GHz
Surface-to-surface:	390-405 MHz <sup>3</sup> 410-420 MHz <sup>3</sup> 435-450 MHz <sup>3</sup> 902-928 MHz <sup>3</sup> 2025-2120 MHz 2200-2300 MHz 2400-2480 MHz 2503.5-2620 MHz 5150-5835 MHz <sup>5</sup> 25.25-25.5 GHz 27.225-27.5 GHz
Orbit-to-orbit:	390-405 MHz <sup>3</sup> 435-450 MHz <sup>3</sup>

<sup>2</sup> Use of 37-37.5 GHz band for deep space SRS (space-to-Earth) per REC SFCG 14-2R5.

<sup>3</sup> Use in the Mars region is on a non-interference basis to Radio Astronomy and other passive services in the Shielded Zone of the Moon.

<sup>4</sup> Use of the 8500-8550 MHz for Mars surface-to-orbit and orbit-to-orbit communications is on a non-interference basis to the Radiolocation Service.

<sup>5</sup> Use of the 5250-5570 MHz band for Mars surface-to-surface communications is on a non-interference basis to Space Research Service (active).

Link	Frequency
	2025-2120 MHz 2200-2300 MHz 7190-7235 MHz 8450-8550 MHz <sup>4</sup> 22.55-23.55 GHz 25.5-27.5 GHz
Approach Navigation & Atmosphere Radio Science:	8400-8450 MHz

Multiple frequency bands are provided in Table 1 for each communication link. Table 2 presents specific recommendations on the use of these bands, including the merits and precautions that should be considered before choosing a band.

Figure 1 presents a graphic illustration of the vehicles and communication links, and a conceptual future scenario with frequency bands chosen from Table 1.

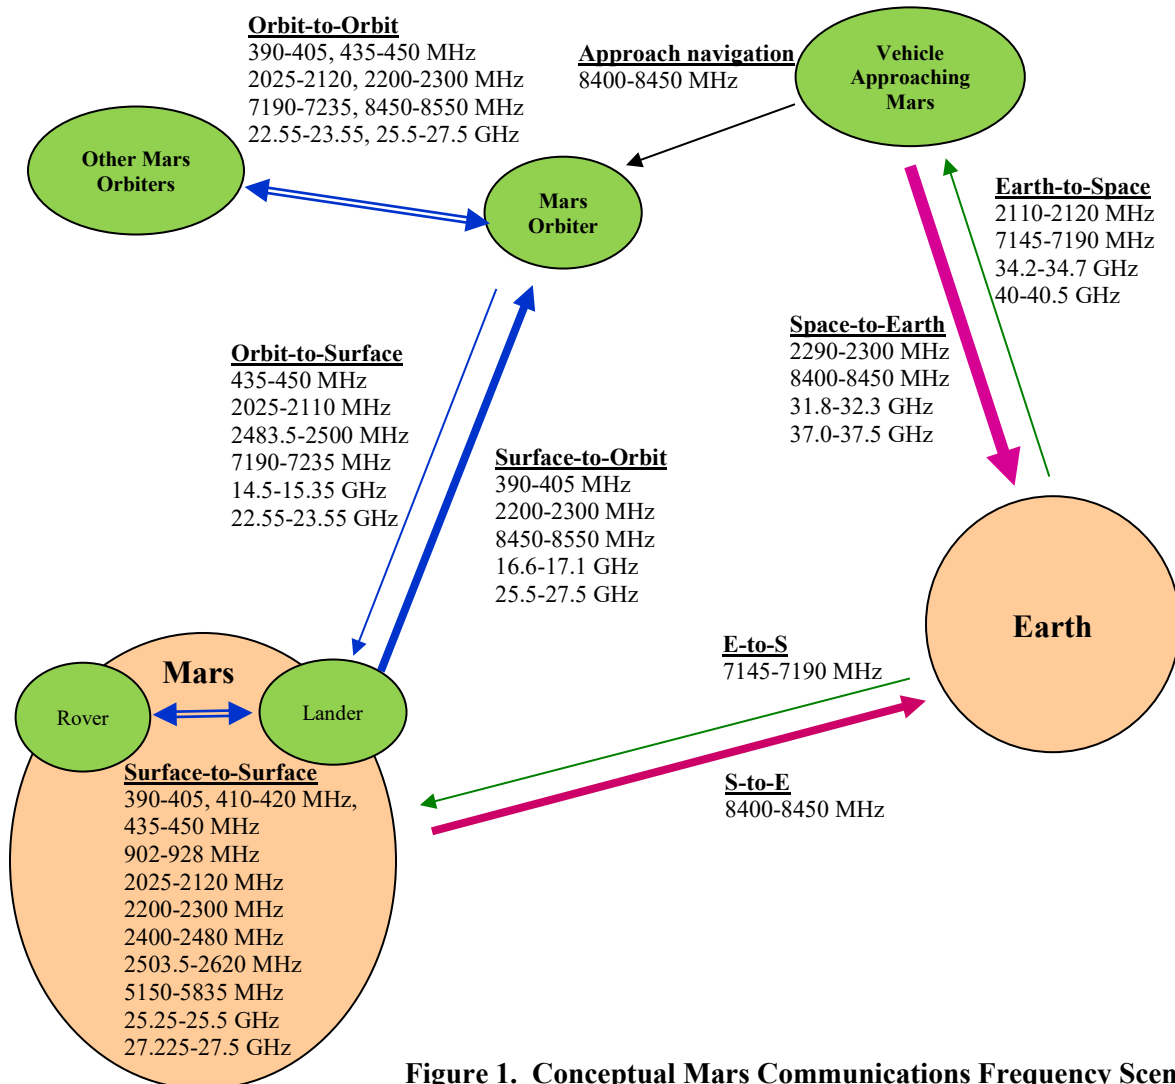


Figure 1. Conceptual Mars Communications Frequency Scenario

**Table 2: Notes on the Mars Frequencies Recommended in Table 1**

General Comments:

1. A few missions also carry S-Band S-to-E or E-to-S links. The use of the S-Band uplink is restricted by IMT2000.
2. For all frequencies on this table, technology or equipment is available in the industry.
3. Saturation or jamming refers to strong interfering signal overwhelming the receiver operating in the same band or adjacent band. For missions at Mars saturation happens only on the same vehicle; it is not likely between vehicles because of the large distance between them.
4. Cross interference refers to interference from one vehicle to another. For Mars missions, such interference is not likely to occur in the adjacent band.

	Data Rate Performance	Accurate Antenna Pointing for Performance	Mass and Volume	Possible Equipment Sharing with Deep Space Space-Earth Links	Self-Interference with Deep Space Space-Earth Links	Cross Interference with Deep Space Space-Earth Links	Testing with Signals Transmitted from an Earth Station	Comments
<b>1.0 Space-to-Earth (S-to-E)</b>								Per ITU-R RR
<b>2.0 Earth-to-Space (E-to-S)</b>								Per ITU-R RR
<b>3.0 Orbit-to-Surface (Command)</b>								
3.1 435-450 MHz	Best at low rate, with LGA	Not required with LGA	Large	none	None	None	Only on non-interfering basis (NIB)	For low rate links Footnote 3 applies.
3.2 2025-2110 MHz	High rate, with MGA/HGA	Required with small beamwidth (A)	Small	If the lander carries an S-Band E-S receiver (Note: Deep space E-to-S is restricted by IMT2000) it is possible to modify the receiver to operate at extended frequencies.	If the orbiter carries S-Band E-S, the S-Band local link transmitter could saturate the S-Band E-S receiver unless there is adequate isolation.	None	Coordination is easier, as the band is allocated to SRS E-S, near Earth, where similar transmissions operate, although at lower power.	For high rate links. Can't share X-Band equipment.

3.3 2483.5-2500 MHz	Low rate with LGA, High rate with MGA	Not required with LGA		None	None		The band is allocated to MSS and RDSS within Earth. A NIB proxi test would be required, in the outdoor test zone on Earth (low power) when needed	For low and medium rate links
3.4 7190-7235 MHz	Higher rate, with HGA	Required with smaller beamwidth (1/4 A)	Smaller	Possible to modify the X-Band E-to-S receiver to operate at extended frequencies.	The orbiter X-Band local link transmitter could saturate an orbiter X-Band E-S receiver unless there is adequate isolation.	None	High power transmission in urban area is restricted to protect fixed and mobile services. A lesser problem in rural areas.	For high rate links. Can share X-Band equipment. Must avoid self-interference to the X-Band E-to-S link
3.5 14.5-15.35 GHz	Higher rate than X-Band, with HGA	Required with even smaller angle (1/8 A)	Smaller than X-Band	None	None	None	NIB	For high rate links
3.6 22.55-23.55 GHz	Very high rates, with HGA	Required with even smaller angle (1/12 A)	Smaller than Ku-Band	None	None	None	Coordination is easier, as the 22.55-23.15 GHz band is allocated to SRS E-S	For very high rate links
<b>4.0 Surface-to-Orbit (Telemetry)</b>								
4.1 390-405 MHz	see 3.1	see 3.1	see 3.1	None	None	None	NIB	For low rate links. Footnote 3 applies.
4.2								
4.3 2200-2290 MHz	see 3.2	see 3.2	see 3.2	If the lander carries S-Band S-E transmitter (2290-2300 MHz), it is	An orbiter S-Band S-to-E transmitter could saturate the orbiter local link receiver	None	NIB	For high rate links. Not as good as 4.4 which allows

				possible to modify the transmitter to operate at extended frequencies.	unless there is adequate isolation.			X-Band equipment sharing.
4.4 2290-2300 MHz	see 3.2	see 3.2	see 3.2	If the lander carries S-Band S-to-E transmitter, the local link can share the transmitter without modification.	An orbiter S-Band S-E link transmitter will saturate the orbiter S-Band local link receiver.	An orbiter with S-Band S-to-E link could interfere with the local link receiver if the latter is in its antenna beam.	NIB	For high rate links. Not as good as 4.4 which allows X-Band equipment sharing.
4.5 8450-8550 MHz	see 3.3	see 3.3	see 3.3	Possible to share a lander X-Band S-to-E transmitter modified to operate at extended frequencies.	Orbiter X-Band S-to-E transmitter could saturate the orbiter local link receiver unless there is adequate isolation.	None	NIB	For high rate links
4.6 16.6-17.1 GHz	see 3.4	see 3.4	see 3.4	None	None	None	Already allocated to SRS, deep space, E-to-S, secondary	For higher rate links
4.7 25.5-27.5 GHz	see 3.4	see 3.4	see 3.4	None	None	None	NIB	For very high rate links
<b>5.0 Surface-to-Surface</b>								
5.1 435-450 MHz and 390-405 MHz	see 3.1	see 3.1	see 3.1	None	None	None	NIB	For low rate links Footnote 3 applies.
5.2 410-420 MHz	see 3.1	see 3.1	see 3.1	None	None	None	NIB	For low rate links.
5.3 902-928 MHz	see 3.1	see 3.1	see 3.1	None	None	None	NIB	For low rate links. Footnote 3 applies.

5.4 2025-2110 MHz and 2200-2290 MHz	Low rate with LGA. Higher rate possible with MGA.	LGA does not require pointing. MGA does.	Small	If lander carries S-Band space-Earth equipment, it is possible to modify it to operate at extended frequencies.	If the lander uses S-Band for space-Earth links, there will be self-jamming between the space-Earth and the local links unless there is adequate isolation.	None	Testing in the 2025-2110 MHz band can be coordinated, as it is in SRS E-S band. Testing in the 2290-2300 MHz band is on NIB.	For higher rate link with line of sight.
5.5 2110-2120 MHz and 2290-2300 MHz	see 5.3	see 5.3	see 5.3	If a lander carries an S-Band space-Earth transmitter or receiver, it can be used for local link.	If the lander uses S-Band space-Earth links, there will be self-jamming between the space-Earth and the local links.	A third vehicle using S-Band space-Earth links may interfere with the local link receiver if it is near the local link receiver, or there is not enough antenna discrimination between the Earth link transmitter and the local link receiver.	The 2110-2120 MHz band is already allocated to SRS, deep space, E-to-S. Testing the 2290-2300 MHz is on NIB.	For higher rate link with line of sight.
5.6 2400-2480 MHz	see 5.3	see 5.3	see 5.3	None	None	None	NIB	For surface Wi-Fi links
5.7 2503.5-2620 MHz	see 5.3	see 5.3	see 5.3	None	None	None	NIB	For surface 3GPP links
5.8 5150-5835 MHz	see 5.3	see 5.3	Smaller than S-band	None	None	None	NIB	For surface Wi-Fi links
5.9 25.25-25.5 GHz and 27.225-27.5 GHz	see 3.6	see 3.6	see 3.6	None	None	None	NIB	For very high data rate links



6.0 Orbit-to-Orbit								
6.1 435-450 MHz and 390-405 MHz	see 3.1	see 3.1	see 3.1	none	None	None	NIB	For low rate links Footnote 3 applies.
6.2 2025-2110 MHz and 2200-2290 MHz	see 3.2	see 3.2	see 3.2	If an orbiter uses S-Band space-Earth link, it is possible to modify space-Earth link equipment to operate at extended frequencies.	If an orbiter uses S-Band space-Earth links, there will be self-jamming between the space-Earth and the local links unless there is adequate isolation.	None	Testing in the 2025-2110 MHz band can be coordinated, as it is in SRS E-S band. Testing in the 2290-2300 MHz band is on NIB.	For high rate links. Less likely to share equipment.
6.3 2110-2120 MHz and 2290-2300 MHz	see 3.2	see 3.2	see 3.2	If orbiter carries an S-Band space-Earth link, the local link can share the same equipment.	If one vehicle uses S-Band space-Earth links, there will be self-jamming between the space-Earth and the local links on the vehicle.	see 5.3	The 2110-2120 MHz band is already allocated to SRS, deep space, E-to-S. Testing the 2290-2300 MHz is on NIB.	For high rate links. Can not share equipment with X-Band S-E links.
6.4 7190-7235 MHz and 8450-8550 MHz	see 3.3	see 3.3	see 3.3	Possible to modify the X-Band space-Earth link equipment to operate in the extended frequency range.	The X-Band transmitter could saturate the X-Band receiver on the same vehicle unless there is adequate isolation.	None	Testing in the 7190-7235 MHz band can be coordinated, as it is in SRS band. Testing in the 8450-8550 MHz band is on NIB.	For high rate links. Possible to share equipment with X-Band S-E link.
6.5 22.55-23.55 GHz and 25.5-27.5 GHz	see 3.5	see 3.5	see 3.5	none	None	None	Testing in the 22.55-23.15 GHz band can be coordinated, as it is in SRS band. Testing in the 23.15-23.55 and 25.5-27.5 GHz band is on NIB.	For very high rate links

7.0 Mars Approach Navigation and Atmosphere Radio Science								
7.1 8400-8450 MHz	Radio metric measurement	Accurate pointing as existing on spacecraft for Earth link.	see 3.3	Sharing equipment with the X-Band S-to-E transmitter	Orbiter doing approach navigation should not operate the Earth link at the same time. Orbiter X-Band S-to-E transmitter will saturate the orbiter local link receiver. However, no simultaneous operation of the Earth link with local link is planned for approach navigation.	Cross interference will not occur with approach navigation. It may happen with occultation radio science when receiver is in the beam of another orbiter transmitting the S-E link.	NIB	