

Style Definition: Heading 3: Font: Not Bold, Not All caps

Style Definition: Heading 4: Font: Not Bold

Proposed Recommendation for  
Space Data System Standards

**NAVIGATION  
HARDWARE  
MESSAGE**

PROPOSED RECOMMENDED STANDARD

CCSDS 510.0-W-12

Deleted: 10

WHITE BOOK

May 2015

Deleted: November

Deleted: 4

Section Break (Continuous)



## AUTHORITY

Issue:	White Book, Issue <a href="#">12</a>
Date:	<a href="#">March 2015</a>
Location:	Not Applicable

Deleted: 10

Deleted: November 2014

(WHEN THIS RECOMMENDED STANDARD IS FINALIZED, IT WILL CONTAIN THE FOLLOWING STATEMENT OF AUTHORITY:)

This document has been approved for publication by the Management Council of the Consultative Committee for Space Data Systems (CCSDS) and represents the consensus technical agreement of the participating CCSDS Member Agencies. The procedure for review and authorization of CCSDS documents is detailed in the *Procedures Manual for the Consultative Committee for Space Data Systems*, and the record of Agency participation in the authorization of this document can be obtained from the CCSDS Secretariat at the address below.

This document is published and maintained by:

CCSDS Secretariat  
Space Communications and Navigation Office, 7L70  
Space Operations Mission Directorate  
NASA Headquarters  
Washington, DC 20546-0001, USA

## FOREWORD

This document is a Proposed Standard for Navigation Hardware Messages and has been prepared by the Consultative Committee for Space Data Systems (CCSDS). The Navigation Hardware Message described in this Proposed Standard is the baseline concept for spacecraft hardware data interchange applications that are cross-supported between Agencies of the CCSDS.

This Proposed Standard establishes a common framework and provides a common basis for the format of spacecraft hardware data exchange between space agencies. It allows implementing organizations within each Agency to proceed coherently with the development of compatible derived standards for the flight and ground systems that are within their cognizance. Derived Agency standards may implement only a subset of the optional features allowed by the Proposed Standard and may incorporate features not addressed by this Proposed Standard.

Through the process of normal evolution, it is expected that expansion, deletion, or modification of this document may occur. This Proposed Standard is therefore subject to CCSDS document management and change control procedures, which are defined in the *"Organization and Processes for the Consultative Committee for Space Data Systems"*. Current versions of CCSDS documents are maintained at the CCSDS Web site:

<http://www.ccsds.org/>

Questions relating to the contents or status of this document should be addressed to the CCSDS Secretariat at the address indicated on page i.

At time of publication, the active Member and Observer Agencies of the CCSDS were:

#### Member Agencies

- Agenzia Spaziale Italiana (ASI)/Italy.
- Canadian Space Agency (CSA)/Canada.
- Centre National d'Etudes Spatiales (CNES)/France.
- China National Space Administration (CNSA)/People's Republic of China.
- Deutsches Zentrum für Luft- und Raumfahrt e.V. (DLR)/Germany.
- European Space Agency (ESA)/Europe.
- Instituto Nacional de Pesquisas Espaciais (INPE)/Brazil.
- Japan Aerospace Exploration Agency (JAXA)/Japan.
- National Aeronautics and Space Administration (NASA)/USA.
- Federal Space Agency (FSA)/Russian Federation.
- UK Space Agency/United Kingdom.

#### Observer Agencies

- Austrian Space Agency (ASA)/Austria.
- Belgian Federal Science Policy Office (BFSP0)/Belgium.
- Central Research Institute of Machine Building (TsNIIMash)/Russian Federation.
- China Satellite Launch and Tracking Control General, Beijing Institute of Tracking and Telecommunications Technology (CLTC/BITTT)/China.
- Chinese Academy of Sciences (CAS)/China.
- Chinese Academy of Space Technology (CAST)/China.
- Commonwealth Scientific and Industrial Research Organization (CSIRO)/Australia.
- CSIR Satellite Applications Centre (CSIR)/Republic of South Africa.
- Danish National Space Center (DNSC)/Denmark.
- Departamento de Ciência e Tecnologia Aeroespacial (DCTA)/Brazil.
- European Organization for the Exploitation of Meteorological Satellites (EUMETSAT)/Europe.
- European Telecommunications Satellite Organization (EUTELSAT)/Europe.
- Geo-Informatics and Space Technology Development Agency (GISTDA)/Thailand.
- Hellenic National Space Committee (HNSC)/Greece.
- Indian Space Research Organization (ISRO)/India.
- Institute of Space Research (IKI)/Russian Federation.
- KFKI Research Institute for Particle & Nuclear Physics (KFKI)/Hungary.
- Korea Aerospace Research Institute (KARI)/Korea.
- Ministry of Communications (MOC)/Israel.
- National Institute of Information and Communications Technology (NICT)/Japan.
- National Oceanic and Atmospheric Administration (NOAA)/USA.
- National Space Agency of the Republic of Kazakhstan (NSARK)/Kazakhstan.
- National Space Organization (NSPO)/Chinese Taipei.
- Naval Center for Space Technology (NCST)/USA.
- Scientific and Technological Research Council of Turkey (TUBITAK)/Turkey.
- Space and Upper Atmosphere Research Commission (SUPARCO)/Pakistan.
- Swedish Space Corporation (SSC)/Sweden.
- United States Geological Survey (USGS)/USA.

## **PREFACE**

This document is a Proposed CCSDS Standard. Its 'White Book' status indicates that the CCSDS believes the document to be technically immature and has not released it for formal review by appropriate technical organizations. As such, its technical contents are not stable, and several iterations of it may occur in response to comments received during the review process.

Implementers are cautioned not to fabricate any final equipment in accordance with this document's technical content.

## DOCUMENT CONTROL

<b>Document</b>	<b>Title and Issue</b>	<b>Date</b>	<b>Status</b>
CCSDS 510.0-W-1	Navigation Hardware Message, Draft Recommended Standard, Issue 0	November 2010	First Draft
CCSDS 510.0-W-2	Navigation Hardware Message, Proposed Recommended Standard, Issue 1	November 2011	More Complete Draft
CCSDS 510.0-W-3	Navigation Hardware Message, Proposed Recommended Standard, Issue 1	January 2012	Draft Containing Suggested Changes
CCSDS 510.0-W-4	Navigation Hardware Message, Proposed Recommended Standard, Issue 1	May 2012	Changes to Formats
CCSDS 510.0-W-5	Navigation Hardware Message, Proposed Recommended Standard, Issue 1	July 2012	Modifications of tables in Annexes and correction of errors
CCSDS 510.0-W-6	Navigation Hardware Message, Proposed Recommended Standard, Issue 1	November 2012	Addition of XML representation and changes resulting from discussions at Working Group meeting, Oct. 2012
CCSDS 510.0-W-7	Navigation Hardware Message, Proposed Recommended Standard, Issue 1	February 2013	Modification to source of mnemonic definitions and reformatting of entire document
CCSDS 510.0-W-8	Navigation Hardware Message, Proposed Recommended Standard, Issue 1	January 2014	Incorporation of suggestions from Spring and Fall 2013 technical meeting and following reviews
CCSDS 510.0-W-9	Navigation Hardware Message, Proposed Recommended Standard, Issue 1	June 2014	Addition of Frame and Calcurve keywords and incorporation of suggestions from Spring 2014 meeting

CCSDS  
510.0-W-11    Navigation Hardware Message,  
Proposed Recommended Standard,  
Issue 1    December  
2014    Addition of changes  
suggested at working  
group meeting including  
removal of of Frame and  
Calcurve keywords

CCSDS    Navigation Hardware Message,  
510.0-W-12    Proposed Recommended Standard,  
Issue 1    May 2015    Addition of changes from  
reviewers including a  
complete rewrite of  
Sections 3 and 5

Deleted: November 2014

Deleted: 10

Deleted: comments



# CONTENTS

SECTION	Page
Section.....	vii
Figures.....	ix
Tables.....	ix
<b>1 INTRODUCTION.....</b>	<b>1-1</b>
<b>1.1 PURPOSE.....</b>	<b>1-1</b>
<b>1.2 SCOPE.....</b>	<b>1-1</b>
<b>1.3 APPLICABILITY.....</b>	<b>1-1</b>
<b>1.4 RATIONALE.....</b>	<b>1-2</b>
<b>1.5 DOCUMENT STRUCTURE.....</b>	<b>1-2</b>
<b>1.6 DEFINITIONS AND CONVENTIONS.....</b>	<b>1-3</b>
<b>1.7 REFERENCES.....</b>	<b>1-4</b>
<b>2 NAVIGATION HARDWARE MESSAGE OVERVIEW.....</b>	<b>2-1</b>
<b>2.1 GENERAL.....</b>	<b>2-1</b>
<b>2.2 THE NAVIGATION HARDWARE MESSAGE (NHM) BASIC FORMAT.....</b>	<b>2-1</b>
<b>3 NAVIGATION HARDWARE MESSAGE CONTENT AND STRUCTURE IN KVN.....</b>	<b>3-1</b>
<b>3.1 GENERAL.....</b>	<b>3-1</b>
<b>3.2 NHM HEADER SECTION.....</b>	<b>3-1</b>
<b>3.3 NHM METADATA SECTION.....</b>	<b>3-2</b>
<b>3.4 NHM DATA SECTION.....</b>	<b>3-3</b>
<b>4 NHM CONTENT AND STRUCTURE IN XML.....</b>	<b>4-1</b>
<b>4.1 GENERAL—THE NHM/XML SCHEMA.....</b>	<b>4-1</b>
<b>4.2 NHM/XML BASIC STRUCTURE.....</b>	<b>4-1</b>
<b>4.3 NHM/XML TAGS.....</b>	<b>4-2</b>
<b>4.4 CONSTRUCTING AN NHM/XML INSTANCE.....</b>	<b>4-2</b>
<b>4.5 LOCAL OPERATIONS.....</b>	<b>4-6</b>
<b>5 NAVIGATION HARDWARE MESSAGE KVN SYNTAX.....</b>	<b>5-1</b>
<b>5.1 GENERAL.....</b>	<b>5-1</b>
<b>5.2 HEADER SECTION SYNTAX.....</b>	<b>5-1</b>
<b>5.3 METADATA SECTION SYNTAX.....</b>	<b>5-3</b>
<b>5.4 DATA SECTION SYNTAX.....</b>	<b>5-9</b>
<b>6 NAVIGATION HARDWARE MESSAGE XML SYNTAX.....</b>	<b>6-1</b>
<b>6.1 OVERVIEW.....</b>	<b>6-1</b>
<b>6.2 NHM LINES IN XML.....</b>	<b>6-1</b>
<b>6.3 NHM VALUES IN XML.....</b>	<b>6-1</b>
<b>6.4 NHM UNITS IN XML.....</b>	<b>6-2</b>
<b>6.5 NHM COMMENTS IN XML.....</b>	<b>6-2</b>

Formatted: Heading 2 Char

Formatted: Font: Bold, All caps

Deleted: 1 INTRODUCTION - 1-1¶

- 1.1 PURPOSE - 1-1¶
- 1.2 SCOPE - 1-1¶
- 1.3 APPLICABILITY - 1-1¶
- 1.4 RATIONALE - 1-2¶
- 1.5 DOCUMENT STRUCTURE - 1-2¶
- 1.6 DEFINITIONS AND CONVENTIONS - 1-3¶
- 1.7 REFERENCES - 1-4¶
- 2 OVERVIEW - 2-1¶
- 2.1 GENERAL - 2-1¶
- 2.2 THE NAVIGATION HARDWARE MESSAGE (NHM) BASIC CONTENT - 2-1¶
- 3 NAVIGATION HARDWARE MESSAGE CONTENT AND STRUCTURE IN KVN - 3-1¶
- 3.1 GENERAL - 3-1¶
- 3.2 NHM HEADER - 3-1¶
- 3.3 NHM METADATA - 3-2¶
- 3.4 NHM DATA - 3-2¶
- 4 NHM CONTENT AND STRUCTURE IN XML - 4-1¶
- 4.1 GENERAL—THE NHM/XML SCHEMA - 4-1¶
- 4.2 NHM/XML BASIC STRUCTURE - 4-1¶
- 4.3 NHM/XML TAGS - 4-2¶
- 4.4 CONSTRUCTING AN NHM/XML INSTANCE - 4-2¶
- 4.5 Local Operations - 4-6¶
- 5 NAVIGATION HARDWARE MESSAGE KVN SYNTAX - 5-1¶
- 5.1 GENERAL - 5-1¶
- 5.2 NHM LINES - 5-1¶
- 5.3 NHM MNEMONIC KEYWORDS - 5-3¶
- 5.4 NHM HARDWARE DATA RECORD VALUES - 5-7¶
- 5.5 UNITS IN THE NHM - 5-10¶
- 5.6 COMMENTS IN AN NHM - 5-10¶
- 6 NAVIGATION HARDWARE MESSAGE XML SYNTAX - 6-1¶
- 6.1 OVERVIEW - 6-1¶
- 6.2 NHM LINES IN XML - 6-1¶
- 6.3 NHM VALUES IN XML - 6-1¶
- 6.4 NHM UNITS IN XML - 6-2¶
- 6.5 NHM COMMENTS IN XML - 6-2¶



<u>ANNEX A IMPLEMENTATION CONFORMANCE STATEMENT PRO FORMA (NORMATIVE) .....</u>	<u>A-1</u>
<u>ANNEX B VALUES FOR THE TIME SYSTEM KEYWORD (NORMATIVE).....</u>	<u>B-1</u>
<u>ANNEX C SECURITY, SANA AND PATENT CONSIDERATIONS (INFORMATIVE) .....</u>	<u>C-1</u>
<u>ANNEX D VALUES FOR DEFINE KEYWORD (INFORMATIVE).....</u>	<u>D-1</u>
<u>ANNEX E EXAMPLE NAVIGATION HARDWARE MESSAGE MNEMONIC KEYWORDS WITH CORRESPONDING ICD INFORMATION (INFORMATIVE) .....</u>	<u>E-1</u>
<u>ANNEX F EXAMPLE NAVIGATION HARDWARE MESSAGES (INFORMATIVE) .....</u>	<u>F-1</u>
<u>ANNEX G NHM EXAMPLE IN XML FORMAT (INFORMATIVE).....</u>	<u>G-1</u>
<u>ANNEX H INFORMATIVE REFERENCES (INFORMATIVE).....</u>	<u>H-1</u>
<u>ANNEX I NAVIGATION HARDWARE MESSAGE GOALS AND REQUIREMENTS (INFORMATIVE) .....</u>	<u>I-1</u>
<u>ANNEX J GRAPHICAL REPRESENTATION OF NHM IN KVN (INFORMATIVE) .....</u>	<u>J-1</u>

Deleted: ANNEX A IMPLEMENTATION CONFORMANCE STATEMENT PROFORMA (NORMATIVE) . A-1¶  
ANNEX B VALUES FOR THE TIME\_SYSTEM KEYWORD (NORMATIVE) . B-1¶  
ANNEX C SECURITY, SANA AND PATENT CONSIDERATIONS (INFORMATIVE) . C-1¶  
ANNEX D VALUES FOR DEFINE KEYWORD (INFORMATIVE) . D-1¶  
ANNEX E EXAMPLE NAVIGATION HARDWARE MESSAGE MNEMONICS WITH CORRESPONDING ICD INFORMATION (INFORMATIVE) . E-1¶  
ANNEX F EXAMPLE NAVIGATION HARDWARE MESSAGES (INFORMATIVE) . F-1¶  
ANNEX G NHM EXAMPLE IN XML FORMAT (INFORMATIVE) . G-1¶  
ANNEX H INFORMATIVE REFERENCES (INFORMATIVE) . H-1¶  
ANNEX I NAVIGATION HARDWARE MESSAGE GOALS AND REQUIREMENTS (INFORMATIVE) . I-1¶  
ANNEX J GRAPHICAL REPRESENTATION OF NHM IN KVN (INFORMATIVE) . J-1¶  
ANNEX K . J-1¶

**FIGURES**

Formatted: Heading 2 Char

<b>4-1 CDM XML Basic Structure .....</b>	<b>Error! Bookmark not defined.</b>
--	-------------------------------------

Formatted: Font: Bold

Formatted: Font: Bold

**TABLES**

Formatted: Heading 2 Char

<u>4-1 SPECIAL NHM/XML TAGS .....</u>	<u>4-6</u>
<u>3-1 NMH HEADER.....</u>	<u>5-2</u>
<u>5-1 FORMAT OF NHM MNEMONIC KEYWORDS .....</u>	<u>5-6</u>
<u>A-1 NORMATIVE VALUES FOR TIME SYSTEM METADATA KEYWORD .....</u>	<u>B-1</u>
<u>B-1..... DEFINED VALUES FOR THE SYSTEM FIELD ASSOCIATED WITH THE MNEMONIC KEYWORD IN THE METADATA SECTION .....</u>	<u>D-2</u>
<u>B-1..... DEFINED VALUES FOR THE SYSTEM FIELD ASSOCIATED WITH THE MNEMONIC KEYWORD IN THE METADATA SECTION .....</u>	<u>E-1</u>
<u>G-1 PRIMARY REQUIREMENTS .....</u>	<u>I-2</u>
<u>G-2 PRIMARY REQUIREMENTS.....</u>	<u>I-3</u>

Deleted: 3-1 . NMH Header . 3-2¶  
3-2 . NHM Data Section Generic Format . 3-6¶  
4-1 . Special NHM/XML Tags . 4-6¶  
5-1 . Format of NHM Mnemonic Keywords . 5-4¶  
A-1 . Normative Values for TIME\_SYSTEM Metadata Keyword . A-1¶  
B-1 . Defined values for the System Field associated with the Mnemonic Keyword in the Metadata Section . B-1¶  
B-2 . Defined Values for the Hardware Type Field Associated with the Mnemonic Keyword in the Metadata Section . B-1¶  
B-3 . Defined Values for the Data Symbols Data Format Fields Associated with the Mnemonic Keyword in the Metadata Section . B-2¶  
G-1 . Primary Requirements . G-2¶  
G-2 . Primary Requirements . G-3¶  
Section Break (Continuous)  
Section Break (Next Page)



# 1 INTRODUCTION

## 1.1 PURPOSE

The Navigation Hardware message is intended to provide a uniform format for the transmission of data from a ground system functional group that receives and unpacks spacecraft telemetry to any spacecraft functional group that uses spacecraft navigation data for determination or analysis of the spacecraft attitude or orbit. Onboard hardware data that can be used for spacecraft navigation is called Navigation Hardware Data.

This document includes goals and criteria that the message format has been designed to meet. For exchanges where these requirements do not capture the needs of the participating agencies another mechanism could be selected.

## 1.2 SCOPE

This Proposed Standard contains the specifications for a Navigation Hardware Message designed for spacecraft navigation applications that input hardware data. These applications include monitoring of the performance of the spacecraft onboard attitude determination and control, its onboard orbit determination (if applicable), and its navigation hardware, as well as calibration of spacecraft navigation hardware. The term “Hardware Data” is used in this document to include both data produced by navigation hardware and data that results from onboard processing of the data produced by the hardware. Similarly, the term “measurement” is used in this document to include both hardware measurements and processed hardware measurements. Although the NHM is designed for transmission of navigation hardware data, the standard could also be applied to spacecraft data intended for other purposes such as monitoring of functions that are not navigation related.

The Proposed Standard cannot explicitly include all types of Navigation Hardware data that exist or will exist in the future. It is intended to contain a syntax which can be used to define the transmission of those spacecraft hardware data that are not explicitly included.

Definition of the accuracy of data in any particular NHM is outside the scope of this Proposed Standard. An Interface Control Document (ICD) between data exchange participants is the preferred means for defining accuracies. This ICD can also be used to define any non-standard hardware data formats that might be required.

## 1.3 APPLICABILITY

Telemetry Data is transmitted from spacecraft to ground stations according to established standards. This document does not address that standard. This Proposed Standard is applicable only to the message format and content, but not to its transmission. The method of transmitting the message between exchange partners is beyond the scope of this document and will generally be specified in the ICD. Message transmission could be based on a CCSDS data transfer protocol, file based transfer protocol such as SFTP, stream-oriented media, or other secure transmission mechanism. In general, the transmission mechanism will not place constraints on the technical data content of an NHM.

**Deleted:** The data arising from onboard

**Deleted:** This Navigation Hardware Message (NHM) Proposed Standard specifies a message format for use in exchanging spacecraft hardware data used in navigation processes between parties that provide such data and those that use it such as from an agency that receives spacecraft telemetry containing hardware data to other agencies that use spacecraft hardware data.

**Moved down [1]:** The hardware data must first be unpacked from the telemetry before distribution in the NHM format. The data is then used to monitor and analyze performance of the hardware and of the onboard use of the hardware data including attitude and orbit determination. The standardization of hardware data formats facilitates development of software to perform the desired monitoring and analysis functions and reduces the risk of error in such software. ¶

**Deleted:** It addresses only the transmission of data after it has been unpacked from telemetry and is ready to transmit to users.

## 1.4 RATIONALE

Spacecraft hardware data are used for many required ground-processing functions. Navigation Hardware data is essential to perform the underlying functions of navigation, but there is presently no uniform standard for their formatting.

In order for a standard to be useful it is necessary that it applies to the many thousands of types of hardware measurement data that exist and be flexible enough to be adaptable to new spacecraft hardware.

The approach taken in this proposed standard is to avoid explicitly enumerating all of the possible hardware measurement data, but instead to provide a flexible syntax through which present and future hardware data could be identified.

## 1.5 DOCUMENT STRUCTURE

This document consists of several sections plus annexes.

- Section 1 contains an overview of the standard, a description of the structure of this document and of the conventions and common material used in it.
- Section 2 provides a brief overview of the CCSDS-recommended Navigation Hardware Message (NHM).
- Section 3 provides details about the structure and content of the NHM in the KVN format.
- Section 4 provides details about the structure and content of the NHM in the XML format.
- Section 5 provides details about the syntax used in the NHM in the KVN format.
- Section 6 provides details about the syntax used in the NHM in the XML format.
- Annex A contains an Implementation Conformance Statement (ICS) pro forma that may be used by implementers to compactly describe their implementations.
- Annex B provides a normative list of approved values for the NHM TIME\_SYSTEM keyword.
- Annex C discusses [Security](#), SANA and patent considerations.
- Annex D provides tables of examples of values for fields composing the Mnemonic Keyword along with a description of the information that would be provided in an ICD for each field.
- Annex E provides examples of navigation hardware message mnemonic keywords with corresponding ICD Information.

Deleted: SECURITY

- Annex F shows how data from various types of spacecraft hardware can be accommodated using the NHM in KVN format, via several examples.
- Annex G contains an example of an NHM in XML [format](#).
- Annex H contains a list of informative references.
- Annex I contains a description of the requirements and criteria that the message format has been designed to meet.
- Annex J contains a graphical representation of the NHM structure in KVN format.

Commented [J1]: Erroneous hyperlinks removed

## 1.6 DEFINITIONS AND CONVENTIONS

Conventions and definitions of navigation concepts such as reference frames, time systems, etc., are provided in references [H2], [H3].

### 1.6.1 Terms

For the purposes of this document, the following definitions apply:

**Navigation Hardware:** consists of the sensors and actuators that are the source of data involved in any computations of spacecraft orbit or attitude.

**Navigation Hardware Data:** includes all values originating from Navigation Hardware including both unprocessed measurements and processed results.

Deleted: d

**Keyword = Value Notation (KVN):** denotes a format which associates a Value with a keyword. The keyword designates an important property or attribute of the subject under discussion, and the value consists of one or more data items which represent measurements or descriptive states of that property.

**eXtensible Markup Language (XML):** denotes a language in which the NHM can optionally be expressed (see reference [1], [2]).

**Interface Control Document (ICD):** denotes a formal agreement between the data transmission and data receipt entities. It is not limited to documents with the title “Interface Control Document.”

**Space Assigned Numbers Authority (SANA):** is the registrar function for the protocol registries created under the Consultative Committee for Space Data Systems (CCSDS).

### 1.6.2 NOMENCLATURE

The following conventions apply for the normative specifications in this document:

- a) the words ‘shall’ and ‘must’ imply a binding and verifiable specification;
- b) the word ‘should’ implies an optional, but desirable, specification;

- c) the word ‘may’ implies an optional specification;
- d) the words ‘is’, ‘are’, and ‘will’ imply statements of fact.

NOTE – These conventions do not imply constraints on diction in text that is clearly informative in nature.

### 1.6.3 Conventions

The term ‘n/a’ or ‘N/A’ denotes an attribute that is not applicable or not available.

In this document, the term ‘ASCII’ is used generically to refer to the text character set defined in reference [4].

**CamelCase.** A style of capitalization in which the initial characters of concatenated words are capitalized, as in *CamelCase*.

**lowerCamelCase.** A variant of CamelCase in which the first character of a character string formed from concatenated words is lowercase, as in *lowerCamelCase*. In the case of a character string consisting of only a single word, only lowercase characters are used.

## 1.7 REFERENCES

The following documents contain, through reference in this text, provisions of this Proposed Standard. At the time of publication, the editions indicated were valid. All documents are subject to revision, and users of this Proposed Standard are encouraged to investigate the possibility of applying the most recent editions of the documents indicated below. The CCSDS Secretariat maintains a register of currently valid CCSDS documents.

- [1] *XML Schema Part 1: Schema*. 2nd ed. P. Biron and A. Malhotra, eds. W3C Recommendation 28. n.p.: W3C, 2004.
- [2] *XML Schema Part 2: Datatypes*. 2nd ed. P. Biron and A. Malhotra, eds. W3C Recommendation 28. n.p.: W3C, 2004.
- [3] *The International System of Units (SI)*, 8th edition, Bureau International des Poids et Mesures, Organisation Intergouvernementale de la Convention du Mètre, STEDI MEDIA, Paris, 2006.
- [4] *Information Technology—8-Bit Single-Byte Coded Graphic Character Sets—Part 1: Latin Alphabet No. 1*. International Standard, ISO/IEC 8859-1:1998. Geneva: ISO, 1998.
- [5] *Time Code Formats*. Recommendation for Space Data System Standards, CCSDS 301.0-B-4. Blue Book. Issue 4. Washington, D.C.: CCSDS, November 2010.
- [6] *IEEE Standard for Binary Floating-Point Arithmetic*. IEEE Std 754-1985. New York: IEEE, 1985.



[7] *XML Specification for Navigation Data Messages*. Recommendation for Space Data System Standards, CCSDS 505.0-B-1. Blue Book. Issue 1. Washington, D.C.: CCSDS, December 2010.

[8] *United Nations Online Registry of Objects Launched into Outer Space*  
<http://www.unoosa.org/oosa/en/osoindex.html>

Deleted: ¶

Section Break (Next Page)



## 2 NAVIGATION HARDWARE MESSAGE OVERVIEW

### 2.1 GENERAL

This section provides a high-level overview of the CCSDS recommended Navigation Hardware Message.

This Navigation Hardware Message (NHM) Proposed Standard specifies a message format for use in exchanging spacecraft hardware data used in navigation processes between parties that provide such data and those that use it such as from an agency that receives spacecraft telemetry containing hardware data to other agencies that use spacecraft hardware data. The hardware data must first be unpacked from the telemetry before distribution in the NHM format. The data is then used to monitor and analyze performance of the hardware and of the onboard use of the hardware data including attitude and orbit determination. The standardization of hardware data formats facilitates development of software to perform the desired monitoring and analysis functions and reduces the risk of error in such software.

Moved (insertion) [1]

### 2.2 THE NAVIGATION HARDWARE MESSAGE (NHM) BASIC FORMAT

Deleted: CONTENT

2.2.1 The NHM in this version of the Proposed Standard is ASCII-text formatted. While binary-based Navigation Hardware Message formats are computer efficient and minimize overhead during data transfer, there are ground-segment applications for which an ASCII character-based message is more appropriate. For example, ASCII format character-based hardware data representations are useful in transferring data between heterogeneous computing systems, because the ASCII character set is nearly universally used and is interpretable by all popular systems. In addition, direct human-readable dumps of text to displays, emails, documents or printers are possible without preprocessing. The penalty for this convenience is some measure of inefficiency (based on early tests, such penalty would be greatly reduced if the data is compressed for transmission).

Formatted: Heading 3

2.2.2 The NHM is realized as a sequence of plain ASCII text lines (reference [4]), which can be in either a file format or a real-time stream. The content is separated into three basic parts as described in section 3. These parts are the Header, Metadata, and Data. The NHM architecture provides flexibility by defining a syntax which can be used to specify hardware data contents, and provides consistency by defining values that correspond to commonly used hardware.

2.2.3 The ASCII text in an NHM can be exchanged in either of two formats: a KVN or an XML format (see 1.6.1). The KVN formatted NHM is described in sections 3 and 5 of this document. Description of the message format based on XML is detailed in sections 4 and 6 of this document. It is suggested that an ICD specify which NHM ASCII format will be exchanged, the KVN or the XML format, as agreed by the exchange participants.

Deleted: '¶

Deleted: ¶



### 3 NAVIGATION HARDWARE MESSAGE CONTENT AND STRUCTURE IN KVN

#### 3.1 GENERAL

This section applies to KVN format only. A graphical representation of the KVN NHM structure is presented in Annex J.

3.1.1 The NHM shall consist of digital data represented as ASCII text lines (see reference [4]).

3.1.2 The NHM may be represented in KVN format (Keyword = Value Notation).

3.1.3 The Syntax of the NHM lines is specified in Section 5.

3.1.4 An NHM shall contain Hardware Data for a single spacecraft.

3.1.5 An NHM shall contain one each of:

- a) a Header Section (see section 3.2);
- b) a Metadata Section (see section 3.3); and
- c) a Data Section (see section 3.4).

3.1.6 The Header, Metadata, and Data Sections shall be in the order presented in 3.1.5.

Descriptions of the Syntax of each of the sections are provided in section 5 of this document.

3.1.7 An NHM shall be exchangeable as either a real-time stream or as a file.

3.1.8 The NHM file naming scheme should be agreed to on a case-by-case basis between the participating parties, typically specified in an ICD.

3.1.9 NHM exchange methods should be decided on a case-by-case basis by the participating parties and documented in an ICD. The exchange method shall not constrain the data content.

#### 3.2 NHM HEADER SECTION

3.2.1 The NHM shall include a Header that consists of information that identifies the basic parameters of the message.

3.2.2 The header shall consist of one each of:

- a) A line specifying the format version of the message;
  - b) A line specifying the creation date of the message;
- and

**Formatted:** Normal, Level 2, Outline numbered + Level: 2 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.4" + Indent at: 0", Keep with next, Keep lines together, Tab stops: 0.3", List tab + Not at 0.4"

**Formatted:** Normal

**Formatted:** Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Keep with next, Keep lines together

**Deleted:** in KVN format (Keyword = Value Notation).

**Deleted:** lines constituting an

**Deleted:** shall

**Deleted:** as a combination

**Moved (insertion) [2]**

**Formatted:** Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Keep with next, Keep lines together

**Formatted:** Normal, Space Before: 9 pt

**Deleted:** data about data) (

**Deleted:** (navigation data represented as 'Hardware Data Records')

**Deleted:** Optional comments may appear in specified locations in the

**Deleted:** (see

**Deleted:** 5.6).

**Formatted:** Normal

**Moved up [2]:** <#>An NHM shall contain Hardware Data for a single spacecraft.¶

**Deleted:** <#>¶

**Formatted:** Heading 3

**Deleted:** agencies

**Formatted:** Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Keep with next, Keep lines together

**Deleted:** agencies

**Formatted** ...

**Formatted** ...

**Deleted:** FIRST HEADER LINE MUST BE THE FIRST ...

**Deleted:** :¶ ...

**Deleted:** be used in an NHM Header. The order of occurrence ( ...

**Deleted:** Table 3-1: NHM Header¶ ...

**Deleted:** in

**Deleted:** NHM Header, with the exception

**Deleted:** COMMENTS, shall have

c) A line specifying the originator of the message.

3.2.3 The lines shall be in the order presented in 3.2.2.

3.2.4 The header may contain a comment line after the version line and before the creation date line.

### 3.3 NHM METADATA SECTION

3.3.1 The NHM shall include a Metadata Section that consists of information that describes the data content of the message.

3.3.2 The Metadata Section shall include:

a) A single line designating the start of the Metadata Section;

b) A single line specifying the time system used in the message;

c) A single line specifying the name of the single spacecraft from which the message data originates;

d) A single line specifying the identification designator of the single spacecraft from which the message data originates;

e) A single line specifying the start time of the data;

f) At least one Define Block specifying the form of the information in the Data Section;

g) A single line designating the end of the Metadata Section.

3.3.3 The lines shall be in the order presented in 3.2.2.

3.3.4 The Metadata Section may include:

a) A single Comment line immediately after the start line (3.3.1 a);

b) One or more Comment lines in each Define Block;

c) A single line (immediately after the start time line) specifying the Stop Time of the data.

3.3.5 A Define Block shall start with a Define Line, defining a Mnemonic Keyword that will be used in the data section of the message.

Note – The Define Line and the Mnemonic Keyword defined in it are the key, essential features of the NHM.

The purpose of the Define Line is to provide information on the source, number, and type of a group of data on lines in the Data Section. The data in each group are

Deleted: following generic format:

Formatted: Normal, Space Before: 9 pt, Numbered + Level: 1 + Numbering Style: a, b, c, ... + Start at: 1 + Alignment: Left + Aligned at: 0.25" + Indent at: 0.5"

Deleted: keyword = value ¶  
THE NHM HEADER SHALL PROVIDE A CCSDS NAVIGATION HARDWARE MESSAGE VERSION NUMBER THAT IDENTIFIES THE FORMAT VERSION; THE VERSION NUMBER IS INCLUDED TO ANTICIPATE FUTURE CHANGES AND TO PROVIDE THE ABILITY TO EXTEND THE STANDARD WITH NO DISRUPTION TO EXISTING USERS. ¶

The version keyword is CCSDS\_NHM\_VERS and the value shall have the form of x.y where y is incremented for corrections and minor changes, and x is incremented for major changes. ¶ Version 1.0 shall be reserved for the initial version accepted by the CCSDS as an official Recommended Standard ("Blue Book"). ¶ Interagency testing of NHMs shall be conducted using version numbers less than 1.0 (e.g., "0.y"). ¶

Any modification, special requirements, or specific limitations in any specific NHM versions that will be exchanged between agencies (as specified by the keyword CCSDS\_NHM\_VERS) should be documented via an ICD. ¶

THE NHM HEADER SHALL INCLUDE THE CREATION\_DATE KEYWORD WITH THE VALUE SET (...)

Formatted (...)

Formatted (...)

Deleted:

Deleted: Each line in the NHM

Formatted (...)

Deleted: , with the exception of COMMENTS, META\_START (...)

Deleted: have the following generic format

Moved down [3]: keyword = value ¶

Formatted (...)

Deleted: The first and last lines

Deleted: an NHM

Deleted: shall consist

Formatted (...)

Deleted: META\_START and META\_STOP keywords, (...)

Deleted: The NHM Metadata Section shall contain at

Formatted (...)

Deleted: ¶

Deleted: allowed values; and¶

Deleted: table 3-2 shall be used in an NHM Metadata Section. (...)

Deleted: Table 3-2: NHM Metadata¶

Moved down [4]: ¶

Formatted

Deleted: Table 3-4. NHM Data Section Data Record Forma (...)

Deleted: first

Formatted: Normal, Level 3, Indent: Left: 0.5"

Deleted: .

logically related (pertain to the same hardware) and have a common time tag and sampling frequency.

The String defined as the Value of the Define Line will serve as the Keyword on lines in the Data Section.

3.3.6 A Define Block may contain multiple comments following the Define Line.

### 3.4 NHM DATA SECTION

3.4.1 The NHM shall include a Data Section that contains the Navigation Hardware Data.

3.4.2 The Data Section shall include:

a) A single line designating the Start of the Data Section;

b) An arbitrary number of lines containing the Data;

3.4.3 The Data Section may include:

a) A single Comment Line immediately after the Data Start line (3.4.2 a);

b) A single line designating the End of the Data Section immediately after the last data line (3.4.2 b).

**Deleted:** 'COMMENT' keywords

**Deleted:** must appear after the 'DATA\_START' keyword and before any

**Deleted:** Records.

**Formatted:** Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: a, b, c, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0"

**Deleted:** ANY LINE IN THE DATA SECTION

**Deleted:** A KEYWORD NOT DEFINED IN THE METADATA SECTION SHALL NOT BE PROCESSED. ¶  
NOTE - - The structure of the keywords defined in the Metadata Section and used in the

**Deleted:** section is specified in Section 5.3.

**Deleted:** <#>THE VALUE IN EACH HARDWARE DATA RECORD SHALL CONSIST OF A TIMETAG AND ONE OR MORE MEASUREMENTS AS DEFINED FOR THE ASSOCIATED MNEMONIC KEYWORD IN THE METADATA SECTION.¶

The timetag and measurement(s) shall be separated from each other by one or more blank characters.¶

The number of measurements shall be that number specified by the Measurement Count field of the keyword as defined for the record's mnemonic keyword in the Metadata Section.¶

If the Mnemonic Keyword contains a Data Format field the format and order of the measurements shall correspond to that field.¶

Multiple instances of any Mnemonic Keyword may occur in

**Deleted:** but their timetag data elements must differ.¶

**ALL HARDWARE DATA RECORDS SHALL BE IN ASCENDING TIME ORDER.¶**

A DATA\_STOP line shall be

**Deleted:** in the Data Section.

**Formatted:** No bullets or numbering





## 4 NHM CONTENT AND STRUCTURE IN XML

### 4.1 GENERAL—THE NHM/XML SCHEMA

**4.1.1** This section applies only to the XML version only.

**4.1.2** The NHM/XML schema will be available on the SANA Web site. SANA is the registrar for the protocol registries created under CCSDS.

**4.1.3** The NHM XML schema explicitly defines the permitted data elements and values acceptable for the XML version of the NHM message. The location of the NHM/XML schema will be:

<http://sanaregistry.org/r/ndmxml/ndmxml-1.0-nhm-1.0.xsd>

**4.1.4** Where possible this schema uses simple types and complex types used by the constituent schemas that make up Navigation Data Messages (see Reference [7]).

### 4.2 NHM/XML BASIC STRUCTURE

**4.2.1** Each NHM shall consist of a <header> and a <body>.

**4.2.2** The NHM <body> shall consist of a single <segment> construct.

**4.2.3** The NHM <segment> shall consist of a <metadata>/<data> pair, as shown in [Figure 4-1](#).

```

<header>
</header>
<body>
  <segment>
    <metadata>
    </metadata>
    <data>
    </data>
  </segment>
</body>

```

**Figure 4-1: NHM XML Basic Structure**

**Formatted:** Normal, Level 2, Outline numbered + Level: 2 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.4" + Indent at: 0", Keep with next, Keep lines together

**Formatted:** Left, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Tab stops: 0.5", Left

**Formatted:** Normal, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Tab stops: 0.5", Left

**Deleted:** - <http://sanaregistry.org/r/ndmxml/ndmxml-1.0-nhm-1.0.xsd>

**Field Code Changed**

**Formatted:** Font: Bold, All caps

**Formatted:** Normal, Level 2, Outline numbered + Level: 2 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.4" + Indent at: 0", Keep with next, Keep lines together

**Formatted:** Normal, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0"

**Deleted:** figure 4-1

**Formatted:** Font: (Default) Courier New, 10 pt

**Formatted:** Normal, Space Before: 3 pt, Line spacing: At least 13 pt, No widow/orphan control, Keep lines together

**Formatted:** Font: (Default) Courier New, 10 pt

**Formatted:** Font: (Default) Courier New, 10 pt

**Formatted:** Font: (Default) Courier New, 10 pt

**Formatted:** Font: (Default) Courier New, 10 pt

**Formatted:** Font: (Default) Courier New, 10 pt

**Formatted:** Font: (Default) Courier New, 10 pt

**Formatted:** Font: (Default) Courier New, 10 pt

**Formatted:** Font: (Default) Courier New, 10 pt

**Formatted:** Font: (Default) Courier New, 10 pt

**Formatted:** Font: Bold

**Formatted:** Normal, Centered, Keep lines together, Don't hyphenate

**Deleted:** - November 2014

### 4.3 NHM/XML TAGS

4.3.1 An NHM XML tag shall be all uppercase if it corresponds directly to a KVN keyword from the Header or Metadata Section.

4.3.2 There is an exception where there is not a strict correspondence between keywords in the KVN and tags in the XML implementations, specifically, the 'CCSDS\_NHM\_VERS' keyword from the NHM Header. The 'CCSDS\_NHM\_VERS' keyword and its value shall appear as XML attributes rather than an XML element.

4.3.3 NHM XML tag names for the NHM Data Section shall have a special structure noted below due to the way in which the Mnemonic Keywords are dynamically constructed (see Section 5).

4.3.4 NHM XML tags related to the XML message structure (i.e., that do not correspond directly to a KVN keyword) shall be in 'lowerCamelCase' (e.g., <defineBlock>, <header>, <segment>, etc.).

### 4.4 CONSTRUCTING AN NHM/XML INSTANCE

#### 4.4.1 OVERVIEW

This subsection provides more detailed instructions for the user on how to create an XML message based on the ASCII-text KVN-formatted message described in 0 through 0. [Note to Joe: "0 through 0" should be cross references "3.2 through 3.4"]

#### 4.4.2 XML VERSION

4.4.2.1 The first line in the instantiation shall specify the XML version:  
<?xml version="1.0" encoding="UTF-8"?>

This line must appear on the first line of each instantiation, exactly as shown.

#### 4.4.3 BEGINNING THE INSTANTIATION: ROOT DATA ELEMENT

4.4.3.1 An NHM instantiation shall be delimited with the <nhm></nhm> root element tags using the standard attributes documented in Reference [7].

4.4.3.2 The XML Schema Instance namespace attribute must appear in the root element tag of all NHM/XML instantiations, exactly as shown:

xmlns:xsi = "http://www.w3.org/2001/XMLSchema-instance"

4.4.3.3 If it is desired to validate an instantiation against the CCSDS Web-based schema, the xsi:noNamespaceSchemaLocation attribute must be coded as a single string of non-blank characters, with no line breaks, exactly as shown:

Formatted: Normal, Level 2, Outline numbered + Level: 2 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.4" + Indent at: 0", Keep with next, Keep lines together

Formatted: Normal, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0"

Deleted: Set

Formatted: Normal, Level 2, Outline numbered + Level: 2 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.4" + Indent at: 0", Keep with next, Keep lines together

Formatted: Font: Bold, All caps

Formatted: Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Keep with next, Keep lines together

Deleted: 3.2

Deleted: 3.4

Deleted: .

Formatted: Font: Bold, All caps

Formatted: Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Keep with next, Keep lines together

Formatted: Normal, Outline numbered + Level: 4 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.63" + Indent at: 0"

Formatted: Font: Courier New

Formatted: Normal, Space Before: 3 pt

Formatted: Font: Bold, All caps

Formatted: Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Keep with next, Keep lines together

Formatted: Normal, Outline numbered + Level: 4 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.63" + Indent at: 0"

Field Code Changed

Formatted: Default Paragraph Font

Formatted: Normal, Outline numbered + Level: 4 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.63" + Indent at: 0"

Deleted: - November 2014

xsi:noNamespaceSchemaLocation="<http://SANRegistry.org/r/ndmxml/ndmxml-1.0-master.xsd>"

Formatted: Default Paragraph Font, Not Expanded by / Condensed by

NOTE – The length of the value associated with the `xsi:noNamespaceSchemaLocation` attribute can cause the string to wrap to a new line; however, the string itself contains no breaks.

Formatted: Normal, Indent: Left: 0", Hanging: 0.79", Keep lines together, Tab stops: 0.56", Left

4.4.3.4 The final attributes of the `<nhm>` tag shall be 'id' and 'version'.

Formatted: Normal, Outline numbered + Level: 4 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.63" + Indent at: 0"

4.4.3.5 The 'id' attribute shall be 'id="CCSDS\_NHM\_VERS"'. The 'version' attribute shall be 'version="1.0"'.

NOTE – The following example root element tag for an `NHM` instantiation combines all the directions in the preceding several subsections:

```
<?xml version="1.0" encoding="UTF-8" ?>
<nhm xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://sanaregistry.org/r/ndmxml/ndmxml-1.0-master.xsd"
id="CCSDS_NHM_VERS" version="1.0">
```

Formatted: Normal, Indent: Left: 0", Hanging: 0.79", Keep lines together, Tab stops: 0.56", Left

Deleted: nhm

Formatted: Normal, Indent: Left: 0.79", Space Before: 3 pt

Deleted: NHM

Formatted: Default Paragraph Font

Deleted: <http://SANRegistry.org/r/ndmxml/ndmxml-1.0-master.xsd>

#### 4.4.4 THE NHM/XML HEADER SECTION

Formatted: Font: Bold, All caps

4.4.4.1 The NHM header shall have a standard header format, with tags `<header>` and `</header>`.

Formatted: Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Keep with next, Keep lines together

4.4.4.2 Immediately following the `<header>` tag the message may have any number of `<COMMENT></COMMENT>` tag pairs.

Formatted: Normal, Outline numbered + Level: 4 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.63" + Indent at: 0"

4.4.4.3 The standard NHM header shall contain the following element tags:

- a) `<CREATION_DATE>`
- b) `<ORIGINATOR>`

Formatted: Normal, Space Before: 9 pt

Formatted: Normal, Indent: Left: 0", Hanging: 0.79", Keep lines together, Tab stops: 0.56", Left

Formatted: Font: Courier New

Formatted: Normal

NOTE – The rules for these keywords are specified in Table 3-1. The header would look like this:

Formatted: Font: Courier New

Formatted: Font: Courier New

```
<header>
<COMMENT>Some comment string.</COMMENT>
<CREATION_DATE>2010-03-12T22:31:12.000</CREATION_DATE>
<ORIGINATOR>NASA</ORIGINATOR>
</header>
```

Formatted: Font: Courier New

Formatted: Font: Courier New

Formatted: Font: Bold, All caps

Formatted: Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Keep with next, Keep lines together

#### 4.4.5 THE NHM/XML BODY SECTION

Formatted: Normal, Outline numbered + Level: 4 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.63" + Indent at: 0"

4.4.5.1 After coding the `<header>`, the instantiation must include a `<body></body>` tag pair.

Deleted: - November 2014

4.4.5.2 Inside the <body></body> tag pair must appear one <segment></segment> tag pair.

NOTE – In essence, the segment tag in the NHM XML implementation is not strictly necessary, however, it is necessary for structural symmetry with the overall NDM/XML paradigm (see Reference [7]).

Formatted: Normal, Indent: Left: 0", Hanging: 0.79", Keep lines together, Tab stops: 0.56", Left

Field Code Changed

4.4.5.3 The <segment> must be made up of one <metadata></metadata> tag pair and one <data></data> tag pair.

Formatted: Normal, Outline numbered + Level: 4 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.63" + Indent at: 0"

#### 4.4.6 THE NHM/XML METADATA SECTION

Formatted: Font: Bold, All caps

4.4.6.1 The Metadata Section shall be set off by the <metadata></metadata> tag combination.

Formatted: Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Keep with next, Keep lines together

4.4.6.2 Between the <metadata> and </metadata> tags, the keywords shall be those specified in table 3-2 with the exception of the META\_START and META\_STOP keywords.

Formatted: Normal, Outline numbered + Level: 4 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.63" + Indent at: 0"

Deleted: 3-2

#### 4.4.6.3

Each NHM/XML Metadata Section shall include at least one <defineBlock></defineBlock> construct which is used to provide a set of descriptive information about an instrument in the Data Section.

Formatted: Font: Courier New

Formatted: Normal

Deleted: defineSet<</defineSet

4.4.6.4 The <defineBlock> shall consist of a required DEFINE Keyword, and one or more optional comment statements as follows:

Formatted: Normal, Outline numbered + Level: 4 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.63" + Indent at: 0"

```
<defineBlock>
  <DEFINE>Mnemonic Keyword here</DEFINE>
  <COMMENT>...</COMMENT>
</defineBlock>
```

Deleted: Set

Deleted: .

Deleted: <defineSet>¶
<define>Primary IRU Rates</define>¶
<MNEMONIC>...</MNEMONIC>¶
<UNITS>...</UNITS>¶
</defineSet

#### 4.4.7 THE NHM DATA SECTION

The Data Section shall follow the Metadata Section and shall be set off by the <data></data> tag combination.

Formatted: Normal

Formatted: Font: Courier New

Formatted: Font: Bold, All caps

Between the <data> and </data> tags, the keywords shall be the mnemonics defined in the Metadata section.

Formatted: Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Keep with next, Keep lines together

Deleted: m

Each NHM/XML Data Section shall include at least one <hardwareDataRecord></hardwareDataRecord> construct which is used to provide a set of measurements from one of the instruments defined in the Metadata Section. This construct is shown in figure 4-2:

Deleted: - November 2014



#### 4.4.8 SPECIAL NHM/XML TAGS

Special tags shall be used to encapsulate the information in the XML implementation of the NHM that are not necessary in the KVN implementation. The special tags indicating logical block divisions shall be those defined in table 4-1.

**Table 1: Special NHM/XML Tags**

Special Tag	Definition
<defineBlock>	Delineates the definition of a Mnemonic Keyword
<hardwareDataRecord>	Distinguishes one Hardware Data Record from the next.
<keyword>	Contains one of the mnemonic keywords DEFINED in the metadata, in particular, the one associated with the measurements in a given Hardware Data Record.
<timetag>	Contains the timetag of the particular measurement(s) in the Hardware Data Record
<measurement>	Contains a number received from telemetry data.

#### 4.5 LOCAL OPERATIONS

**4.5.1** For use in a local operations environment, the NDM/XML schema set (which includes the NHM schema) may be downloaded from the SANA web site to a local server that meets local requirements for operations robustness. See reference [7].

**4.5.2** If a local version is used, the value associated with the xsi:noNamespaceSchemaLocation attribute must be changed to a URL that is accessible to the local server.

**Formatted:** Font: Bold, All caps  
**Formatted:** Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Keep with next, Keep lines together

**Deleted:** Table 4-1  
**Formatted:** Normal, Centered, Space Before: 24 pt, After: 12 pt, Keep with next, Keep lines together, Don't hyphenate

**Formatted:** Font: Bold

**Formatted:** Font: (Default) Arial, 10 pt, Bold

**Formatted:** Font: (Default) Arial, 10 pt, Bold

**Formatted:** Font: (Default) Courier New, 10 pt

**Formatted:** Normal, Space Before: 3 pt, Line spacing: At least 13 pt, No widow/orphan control, Keep lines together

**Deleted:** Set

**Formatted:** Font: (Default) Courier New, 10 pt

**Deleted:** Defines

**Formatted:** Font: (Default) Arial, 10 pt

**Deleted:** Keyword and may also include descriptive comments.

**Formatted:** Font: (Default) Courier New, 10 pt

**Formatted:** Normal, Space Before: 3 pt, Line spacing: At least 13 pt, No widow/orphan control, Keep lines together

**Formatted:** Font: (Default) Arial, 10 pt

**Formatted:** Font: (Default) Courier New, 10 pt

**Formatted:** Normal, Space Before: 3 pt, Line spacing: At least 13 pt, No widow/orphan control, Keep lines together

**Formatted:** Font: (Default) Arial, 10 pt

**Formatted:** Normal, Level 2, Outline numbered + Level: 2 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.4" + Indent at: 0", Keep with next, Keep lines together

**Formatted:** Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Keep with next, Keep lines together

**Deleted:** [7].

**Formatted:** Font: Bold, All caps

**Formatted:** Font: Bold, All caps

**Deleted:** - November 2014

## 5 NAVIGATION HARDWARE MESSAGE KVN SYNTAX

### 5.1 GENERAL

This section describes the syntax of each type of line in a navigation hardware message in the KVN format.

5.1.1 Each line in the NHM, with the exceptions specified below, shall have the following generic format:

keyword = value

5.1.2 Comment lines in all sections of the NHM shall consist of the string "COMMENT" followed by any string of ASCII characters. There shall be no equals sign ("=") between the string "COMMENT" and the string of ASCII characters.

Note: This is an exception to KVN Notation.

5.1.3 In Fields that represent a time tag, times shall be given in one of the following two formats:

yyyy-mm-ddThh:mm:ss[.d→d][Z]

or

yyyy-dddThh:mm:ss[.d→d][Z]

where 'yyyy' is the year, 'mm' is the two-digit month, 'dd' is the two-digit day-of-month and 'ddd' is the three-digit day of the year, separated by hyphens, 'T' is a fixed separator between the date and time portions of the string, and 'hh:mm:ss[.d→d]' is the time in hours, minutes, seconds and fractional seconds, separated by colons. As many 'd' characters to the right of the period as required may be used to obtain the required precision, up to the maximum allowed for a fixed-point number. The final character, "Z" is present if the time is in UTC. (see Reference 5.)

### 5.2 HEADER SECTION SYNTAX

#### Format Version

5.2.1 The Keyword of the Format Version line shall be "CCSDS\_NHM\_VERS".

5.2.2 The Value in the Format Version line shall be version in the form of 'x.y', where 'y' shall be incremented for corrections and minor changes, and 'x' shall be incremented for major changes.

Note: Format versions 0.y are reserved for test versions of the message.

#### Creation Date

5.2.3 The Keyword of the Creation Date line shall be "CREATION\_DATE".

5.2.4 The Value in the Creation Date line shall be the Message creation date/time in UTC.

**Formatted:** Normal, Level 2, Outline numbered + Level: 2 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.4" + Indent at: 0", Keep with next, Keep lines together, Tab stops: 0.3", List tab + Not at 0.4"

**Deleted:** The NHM shall observe

**Deleted:** described

**Moved (insertion) [3]**

**Formatted:** Border: : (Single solid line, Auto, 0.5 pt Line width)

**Deleted:** 5.2 THROUGH 5.6.¶  
NHM LINES¶  
THE

**Deleted:** A SET OF NHM LINES. ¶  
THE NHM LINE SHALL CONTAIN ONLY PRINTABLE

**Formatted:** Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Tab stops: 0.3", List tab + Not at 0.5"

**Deleted:** BLANKS. ¶

**Deleted:** control

**Deleted:** (such as TAB, etc.) shall not be used, except as indicated below for the termination of the NHM record.

**Deleted:** An NHM line

**Deleted:** not exceed 254 ASCII

**Formatted:** Normal

**Deleted:** and spaces (excluding line termination)

**Deleted:** [s].

**Deleted:** Each NHM

**Formatted:** Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Tab stops: 0.3", List tab + Not at 0.5"

**Deleted:** one of the following:

**Deleted:** <#>Header Section line;¶

**Deleted:** - November 2014

## Message Originator

**5.2.5** The Keyword of the Message originator line shall have be “ORIGINATOR”.

**5.2.6** The Value in the Message Originator line shall identify the agency or other creator of the message. This value should be specified in an ICD.

Note: A summary of the NHM header syntax with examples is provided in Table 5-1.

**Table 2: Summary of NHM Header Section Syntax**

<u>Keyword</u>	<u>Description</u>	<u>Obligatory</u>
<u>CCSDS_NHM_VERS</u>	Format version in the form of 'x.y', where 'y' shall be incremented for corrections and minor changes, and 'x' shall be incremented for major changes.	<u>Yes</u>
<u>Examples:</u> <u>CCSDS_NHM_VERS = 0.12</u> <u>CCSDS_NHM_VERS = 1.0</u>		
<u>COMMENT</u>	<u>See 5.1.2</u>	<u>No</u>
<u>Example:</u> <u>COMMENT This is important</u>		
<u>CREATION_DATE</u>	Data creation date/time in UTC. For format specification, see <u>5.4.13</u> .	<u>Yes</u>
<u>Examples:</u> <u>CREATION_DATE = 2001-11-06T11:17:33</u> <u>CREATION_DATE = 2002-204T15:56:23.4</u> <u>CREATION_DATE = 2006-001T00:00:00Z</u>		
<u>ORIGINATOR</u>	Creating agency. Value should be specified in the ICD.	<u>Yes</u>
<u>Examples:</u> <u>ORIGINATOR = CNES</u> <u>ORIGINATOR = ESOC</u> <u>ORIGINATOR = GSFC</u>		

Deleted: - November 2014



### 5.3 METADATA SECTION SYNTAX

#### Start Line

5.3.1 The Keyword of the first line of the Metadata Section shall be “META\_START”.

5.3.2 There shall be no Value for the META\_START line. This is an exception to the KVN notation.

#### Time System Line

5.3.3 The line specifying the Time System shall have the Keyword “TIME\_SYSTEM”.

5.3.4 The Value in the line specifying the Time System shall be selected from the full set of allowed values enumerated in Annex B.

#### Object Name Line

5.3.5 The line specifying the Object Name shall have the Keyword “OBJECT\_NAME”.

5.3.6 The Value in the line specifying the Object Name may have any value but it is recommended to use names from the United Nations Online Registry of Objects Launched into Outer Space (Reference [8]) which includes the Object name and international designator of the participant.

#### Object Identity Line

5.3.7 The line specifying the Object Identity shall have the Keyword “OBJECT\_ID”.

5.3.8 The Value in the line specifying the Object Identity may have any value but it is recommended that the values be drawn from the United Nations Online Registry of Objects Launched into Outer Space (Reference [8]). If this source is chosen, it is recommended that values have the format YYYY-NNNP{PP}, where:

– YYYY = year of launch; – NNN = three-digit serial number of launch in year YYYY (with leading zeros);  
– P{PP} = at least one capital letter for the identification of the part brought into space by the launch.

In cases where the asset is not listed in the registry, the value should be provided in an ICD.

#### Start Time Line

5.3.9 The line (if it exists) specifying the Message Start Time shall have the Keyword “START\_TIME”.

5.3.10 The Value in the line specifying the Message Start Time shall be the earliest time of the Hardware Data immediately following the Metadata Section. The Start Time value shall be relative to the time system specified by the TIME\_SYSTEM keyword.

#### Stop Time Line

Deleted: line;

Formatted: Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Keep with next, Keep lines together

Deleted: <#>Data Section line;¶

blank line.¶

All Header Section, Metadata Section, and Data Section lines, with exceptions as noted below, shall use 'keyword = value' syntax, abbreviated as KVN.¶

The keywords COMMENT, META\_START, META\_STOP, DATA\_START, and DATA\_STOP are exceptions to the KVN syntax.¶

**ONLY A SINGLE 'KEYWORD = VALUE' ASSIGNMENT SHALL BE MADE ON AN NHM LINE.¶**

**KEYWORDS MUST NOT CONTAIN BLANKS.¶**

**THE FOLLOWING DISTINCTIONS IN KVN SYNTAX SHALL APPLY FOR NHM KVN LINES.¶**

NHM KVN lines in the Header and Metadata Section, with exceptions as noted below, shall consist of a keyword, followed by an equals sign '=', followed by a single value assignment.¶

NHM KVN lines in the Data Section shall be COMMENT lines, DATA\_START lines, DATA\_STOP lines or DATA RECORD lines.¶

NHM KVN Hardware Data Records shall consist of a Mnemonic Keyword, followed by an equals sign '=', followed a value.¶

Mnemonic Keywords in Hardware Data Records must be defined in the Metadata Section.¶

NOTE - - - The keywords defined with a DEFINE line in the Metadata Section and used in the Data Records are referred to as "Mnemonic Keywords".¶

The value that follows the Mnemonic Keyword in Hardware Data Records shall consist of at least two elements.¶

The first element after the equals sign shall be a timetag.¶

Each element after the timetag shall consist of a single measurement or calculated value associated with that timetag. An arbitrary number of instances of any Mnemonic Keyword (see Section 5.3) may appear as separate Hardware Data Records in the Data Section.¶

¶

Deleted: <#>a Mnemonic Keyword defined for each type of Hardware Data that is to be read in the Data Section.¶

Deleted: <#>field

Deleted: <#>referred

Deleted: <#>as

Deleted: <#>System Field

Deleted: ¶

Deleted: System Field

Formatted

Deleted: of the strings one of the strings specified in a SANA

Deleted: (see Annex C) or shall be specified

Deleted: NOTE - - - An ICD should be used only

Deleted: appropriate designator is not

Deleted: SANA registry. If the designator might be used on other missions it would be preferred to add

Deleted: designator

Deleted: - November 2014

**5.3.11** The line (if it exists) specifying the Message Stop Time shall have the Keyword “STOP TIME”.

**5.3.12** The Value in the line specifying the Message Stop Time shall be the latest time of the Hardware Data immediately following the Metadata Section. The Stop Time value shall be relative to the time system specified by the TIME\_SYSTEM keyword.

### Define Block

**5.3.13** There shall be at least one Define Block in the Metadata Section.

**5.3.14** Each Define Block shall contain a single Define Line followed by an arbitrary number of Comment lines.

Note: Syntax for the Comment Lines is specified in Section 5.1.2.

**5.3.15** The Keyword of a Define Line shall be “DEFINE”.

**5.3.16** The Value in a Define Line shall be an ASCII string with four mandatory fields (the System Field, the **Hardware Type Field**, the Data Group Field, and the Measurement Count Field) and one optional field (the Measurement Type Field), separated by period characters “.”

Note: The string composing the Value in a Define Line is called a Mnemonic Keyword. A summary of the Mnemonic Keyword Syntax with examples is provided in Table 5-2. The Mnemonic Keyword is used as the Keyword in lines in the Data Section. The fields in the Mnemonic Keyword describe the data that appears on the corresponding lines in the Data Section.

**Formatted:** Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Keep with next, Keep lines together

**Deleted:** SANA

**Deleted:** <#>Hardware Type Field¶  
The second field of a Mnemonic Keyword definition

**Deleted:** specify

**Deleted:** type of hardware from which

**Deleted:** data that

**Deleted:** associated

**Formatted:** Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Keep with next, Keep lines together

**Formatted:** Font: Bold

**Deleted:** this Mnemonic Keyword originates.¶  
NOTE - - . This field is referred to as the Hardware Type field. ¶  
The

**Formatted:** Font: Bold

**Deleted:** shall consist of an alphanumeric string.¶  
The string contained in the Hardware Type field shall be one of the strings specified in a SANA registry (see Annex C) or shall be specified in an ICD.¶

NOTE - - . An ICD should be used only if the appropriate designator is not in the SANA registry. In that event, if the designator is not considered unique, addition of the designator to the SANA registry is preferred.¶

**Deleted:** ¶  
The third field of a Mnemonic Keyword shall specify the group of data that is associated with this Mnemonic Keyword. . .

NOTE - - . This field is referred to as the Data Group field.¶

¶  
The first 3 characters of the Hardware Type Field shall be one of the strings specified in a SANA registry (see Annex C) or shall be specified in an ICD. . .

NOTE - - . An ICD should be used only if the appropriate designator is not in the SANA registry. In that event, if the designator is not considered unique, addition of the designator to the SANA registry is preferred. Because individual users may require different groupings of data from the same hardware, ICDs will generally be necessary.¶

An integer may follow the first three characters of the Hardware Type Field to designate an instance of the hardware.¶

**Deleted:** ¶  
The fourth field of a Mnemonic Keyword shall specify the number of measurements that will appear in each record of the Data Section that begins with the Mnemonic Keyword. . .

NOTE - - . This field is referred to as

**Deleted:** Count field.

**Deleted:** - November 2014

5.3.16.1 The System Field shall represent the Spacecraft System from which the data arises and shall be selected from those in a SANA registry (see annex C) or specified in an ICD. Every effort should be made to select a value from the SANA registry.

5.3.16.2 The Hardware Type Field shall start with an upper case alphabetic string containing exactly three characters followed by an integer that specifies the instance of this hardware. If only one instance exists, the value (1) must be used. The three character code must be either selected from those in a SANA registry (see annex D) or specified in an ICD.

Note: Every effort should be made to select a value from the SANA registry.

5.3.16.3 The Data Group Field shall be an arbitrary string of alphanumeric characters starting with an alphabetic character that identifies the set of data arising from the hardware.

Note: This string should be specified in an ICD.

5.3.16.4 If more than one instance of a data group is possible, a numerical designator of the instance referred to shall be the last character(s) in the field.

5.3.16.5 The Measurement Count Field shall consist of the letter “V” followed by an integer specifying the total number of Data Fields that will occur on each line in the Data Section in which this Mnemonic Keyword appears.

5.3.16.6 The Measurement Type field shall be a string consisting of a series of ASCII characters representing the type of the data of each of the Data Fields (in lines in the Data Section with the corresponding Mnemonic Keyword), each optionally followed by an integer.

- There must be one character in the Measurement Type Field for each of the Data Fields in the Hardware Data Record containing the Mnemonic Keyword except that if the same Measurement Types are repeated, a single character followed by an integer representing the number of repetitions may be used.
- The symbols indicating the Measurement Types shall be in the same order that the Data Fields associated with this Mnemonic Keyword will appear on records in the Data Section.
- The data types shall be either selected from those in a SANA registry (see annex D) or specified in an ICD. Every effort should be made to select a value from the SANA registry.

**Deleted:** f

**Formatted:** Normal, Level 4, Outline numbered + Level: 4 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.63" + Indent at: 0", Keep with next, Keep lines together

**Deleted:** character

**Deleted:** values

**Deleted:** be in Hardware Data Records. .

**Deleted:** <#>MEASUREMENT Type Field¶  
The fifth field of the Mnemonic Keyword may optionally be included to specify the format of the measurements associated with the Mnemonic Keyword.¶  
NOTE . . . . This field is referred to as the Measurement Type field.¶

**Deleted:** <#>consist of one or more alphabetic

**Deleted:** <#>.

**Deleted:** <#>which may be

**Deleted:** <#>The alphabetic characters in the Measurement Type field shall be one of the values of Measurement Types specified in a SANA registry (see Annex C) or shall be specified in an ICD.¶  
NOTE . . . . An ICD should be used only if the appropriate designator is not in the SANA registry. In that event, if the designator is not considered unique, addition of the designator to the SANA registry is preferred.¶  
The integers following any alphabetic

**Formatted:** Normal, Bulleted + Level: 1 + Aligned at: 0" + Indent at: 0.25"

**Formatted:** Font: Bold

**Deleted:** <#>field shall be the number of contiguous measurements of that Measurement Type that that will be in

**Deleted:** <#>Records associated with the Mnemonic Keyword.¶  
If an integer is not present following an alphabetic character in the Measurement Type field the number of contiguous measurements of that Measurement Type shall be construed to be 1.¶  
The sum of the number of measurements with types specified in the Measurement Type field shall equal the number of measurements specified in the Measurement Count field. ¶  
The order of the types specified in the Measurement Type field shall be the same as the order of the measurements that will be in Data Records

**Deleted:** <#>.

**Formatted:** Font: Bold

**Deleted:** . November 2014



**Stop Line**

5.3.17 The Keyword of the last line of the Metadata Section shall be “META\_STOP”.

5.3.18 There shall be no Value for the META\_STOP line. This is an exception to the KVN notation.

Note: A summary of the NHM Metadata Syntax with examples is provided in Table 5-3.

**Table 5-3 Summary of NHM METADATA Section Syntax**

<u>Keyword</u>	<u>Description</u>	<u>Obligatory</u>
<u>META_START</u>	The <u>META_START</u> keyword delineates the start of the NHM Metadata Section within the message. It appears on a line by itself; i.e., it shall have no equal sign or value.	Yes
<u>Example:</u> <u>META_START</u>		
<u>COMMENT</u>	See 5.1.2. Comments in Metadata may appear immediately after <u>META_START</u> or after a Define Line in a <u>DEFINE_BLOCK</u> .	No
<u>Example:</u> <u>COMMENT this is important</u>		
<u>TIME_SYSTEM</u>	The <u>TIME_SYSTEM</u> keyword specifies the time system used for timetags in the Data Section.	Yes
<u>Examples:</u> <u>TIME_SYSTEM = UTC</u> <u>TIME_SYSTEM = TAI</u> <u>TIME_SYSTEM = GPS</u> <u>TIME_SYSTEM = SCLK</u>		
<u>OBJECT_NAME</u>	There is no CCSDS-based restriction on the value for this keyword, but it is recommended to use names from the United Nations Online Registry of Objects Launched into Outer Space (Reference [8]) which includes the Object name and international designator of the participant.	Yes
<u>Examples:</u> <u>OBJECT_NAME = EUTELSAT W1</u> <u>OBJECT_NAME = MARS PATHFINDER</u> <u>OBJECT_NAME = STS106</u>		

Moved (insertion) [4]

Formatted: Font: Bold

Formatted: Normal, Centered, Space Before: 24 pt, After: 12 pt, Keep with next, Keep lines together, Don't hyphenate

Deleted: <#>NHM HARDWARE DATA RECORD VALUES¶ All Hardware Data Records containing a Mnemonic

Deleted: shall also contain a time and a

Deleted: - November 2014

<u>Keyword</u>	<u>Description</u>	<u>Obligatory</u>
<u>OBJECT_ID</u>	<p><u>Spacecraft identifier of the object corresponding to the hardware data to be given. While there is no CCSDS-based restriction on the value for this keyword, the names could be drawn from the United Nations Online Registry of Objects Launched into Outer Space (Reference [8]). If this is chosen, it is recommended that values have the format YYYY-NNNP{PP}, where:</u></p> <ul style="list-style-type: none"> <li><u>– YYYY = year of launch;– NNN = three-digit serial number of launch in year YYYY (with leading zeros);</u></li> <li><u>– P{PP} = at least one capital letter for the identification of the part brought into space by the launch.</u></li> </ul> <p><u>In cases where the asset is not listed in the registry, the value should be provided in an ICD.</u></p>	<u>Yes</u>
<p><u>Examples:</u></p> <p><u>OBJECT_ID = 2000-052A</u></p> <p><u>OBJECT_ID = 1996-068A</u></p> <p><u>OBJECT_ID = 2000-053A</u></p> <p><u>OBJECT_ID = 1996-008A</u></p>		
<u>START_TIME</u>	<p><u>The START_TIME keyword shall specify the start time of the total time span covered by the hardware data immediately following the Metadata Section. The START_TIME value shall be relative to the time system specified by the TIME_SYSTEM keyword. For formatting rules see 5.4.13.</u></p>	<u>No</u>
<p><u>Examples:</u></p> <p><u>START_TIME = 1996-12-18T14:28:15.1172</u></p> <p><u>START_TIME = 1996-277T07:22:54</u></p> <p><u>START_TIME = 2006-001T00:00:00Z</u></p>		
<u>STOP_TIME</u>	<p><u>The STOP_TIME keyword shall specify the stop time of the total time span covered by the hardware data immediately following this Metadata Section. The STOP_TIME value shall be relative to the time system specified by the TIME_SYSTEM keyword. For formatting rules see 5.4.13.</u></p>	<u>No</u>
<p><u>Examples:</u></p> <p><u>STOP_TIME = 1996-12-18T14:28:15.1172</u></p> <p><u>STOP_TIME = 1996-277T07:22:54</u></p> <p><u>STOP_TIME = 2006-001T00:00:00Z</u></p>		

Deleted: - November 2014

<u>Keyword</u>	<u>Description</u>	<u>Obligatory</u>
DEFINE	There shall be one instance of the DEFINE keyword in the Metadata Section for each different set of hardware data that is to be read in the Data Section. The value associated with each DEFINE keyword shall define a single Mnemonic Keyword that will be used in the Data Section for a single set of hardware data.	Yes (at least one)
<p><u>Examples of Define Blocks:</u></p> <pre> DEFINE = ACS.OBC1.QUAT.V5.F4C COMMENT Onboard computed Quaternions as EME2000 inertial frame to body frame COMMENT Floating point Quaternion Values and an onboard filter status COMMENT Status is 'OFF', 'NOT CONVERGED', 'CONVERGED', or 'EXTRAPOLATED"  DEFINE = ACS.TAM1.FIELD.V4.I3B  DEFINE = ACS.STA2.STAR1.V4.I3B COMMENT Star tracker 1, First Star COMMENT Horizontal and Vertical positions and Intensity in counts COMMENT and a quality flag. Quality Flag = 0 means good data </pre>		
META_STOP	The META_STOP keyword shall delineate the end of the NHM Metadata Section within the message. It must appear on a line by itself; i.e., it shall have no parameters, timetags or values.	Yes
<p><u>Example:</u></p> <pre>META_STOP</pre>		

## 5.4 DATA SECTION SYNTAX

### Start Line

5.4.1 The Keyword of the first line of the Data Section shall be “DATA START”.

5.4.2 There shall be no Value for the DATA START line. This is an exception to the KVN notation.

### Comment Line

Note: Syntax for the optional Comment Line is specified in Section 5.1.2.

### Data Line

Deleted: - November 2014

**5.4.3** The Keyword of each Data Line shall be the Value of one of the Define Lines in the Metadata Section.

**5.4.4** The Value of each Data Line shall consist of a Time followed by one or more Measurements.

**5.4.5** The Time and each of the Measurements in the Value of a Data Line shall be separated from each other by one or more blank spaces.

**5.4.5.1** The Time in each Data Line represents the time associated with the hardware measurement(s) according to the TIME\_SYSTEM keyword (see Section 5.1.3).

**5.4.5.2** The number of Measurements in each Data Line shall be in agreement with the Measurement Count Field in the Keyword of the Line.

**5.4.5.3** If the Measurement Type Field exists in the Keyword of a Data Line the Content of each Measurement in that Line shall be in the format and in the order defined for each Measurement Type Field.

Note: See Annex D for the formats of Data Types.

**5.4.5.4** Measurements of type 'C' (Character String) may start and end with a single quotation mark character. If they do then the Character String specified by the Measurement shall include all blank space characters between the quotation marks and shall not include the quotation marks.

Note: The use of quotation marks is intended to allow blank spaces in a measurement of type 'C' and to distinguish these blank spaces from blank spaces that separate measurements.

**Stop Line**

**5.4.6** The Keyword of the optional last line of the Data Section shall be "DATA\_STOP".

**5.4.7** There shall be no Value for the DATA\_STOP line. This is an exception to the KVN notation.

**Table 5-4 Summary of NHM DATA Section Syntax**

Keyword	Description	Obligatory
DATA_START	The DATA_START keyword delineates the start of the NHM Data Section within the message. It appears on a line by itself; i.e., it shall have no equal sign or value.	Yes

- Formatted: Normal, Level 4, Outline numbered + Level: 4 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.63" + Indent at: 0", Keep with next, Keep lines together
- Deleted: for each of the Measurements specified by the Mnemonic Keyword.
- Deleted: <#>THE NUMBER OF MEASUREMENT FIELDS FOR EACH MNEMONIC KEYWORD PROVIDED MUST EQUAL THE NUMBER IN THE "MEASUREMENT COUNT" FIELD OF THE MNEMONIC KEYWORD.¶
- Deleted: <#>f
- Deleted: <#>Mnemonic
- Deleted: <#>format
- Deleted: <#>the measurements in
- Deleted: <#>Field for each Mnemonic Keyword provided
- Deleted: <#>the same as
- Deleted: <#>specified
- Deleted: <#>"
- Deleted: <#>field of the Mnemonic Keyword.
- Deleted: <#>Integer values shall consist of a sequence of decimal digits with an optional leading sign ('+' or '-'). If the sign is omitted, '+' shall be assumed. Leading zeros may be used. - NOTE - - The range of values that may be expressed as an integer is:¶  
-2 147 483 648 <= x <= +2 147 483 647 (i.e., -2<sup>31</sup> <= x <= 2<sup>31</sup>-1)¶
- Deleted: Measurement fields shall contain only printable
- Formatted
- Deleted: symbol (ASCII Character 39).
- Deleted: NOTE . - .
- Deleted: p
- Deleted: rpo
- Deleted: the quotations
- Deleted: accomodate Character Measurement fields which
- Deleted: .¶
- Deleted: single digit; either zero ("0") or one ("1").¶
- Deleted: represent a time tag or epoch, one
- Deleted: following two formats
- Formatted
- Deleted: used:
- Deleted: YYYY-MM-DDThh:mm:ss[d→d][Z]¶
- Deleted: - November 2014



<u>Keyword</u>	<u>Description</u>	<u>Obligatory</u>
<u>Example:</u> DATA_START		
<u>A Mnemonic Keyword</u>	The Keyword of each data line must be one of the Mnemonic Keywords defined in a Define Block in the Metadata Section. The value must contain a time followed by the number of measurements specified in the Value Count field of the Mnemonic Keyword. Note: Because of text wrapping single Data Lines in the examples are shown as multiple lines.	Yes
<u>Examples:</u> ACS.OBC1.QUAT.V5.F4C = 2006-001T00:00:00Z 0.000407362 0.000452896 6.34934041E-05 0.999999812 'NOT CONVERGED' ACS.TAM1.FIELD.V4.I3B = 2006-001T00:00:005Z 8689 6125 -203 1 ACS.OBC1.QUAT.V5.F4C = 2006-001T00:00:01Z 0.000407757 0.000452540 0.000936158 0.999999376 CONVERGED		
<u>DATA_STOP</u>	The DATA_STOP keyword shall delineate the end of the NHM Data Section within the message. It must appear on a line by itself; i.e., it shall have no parameters, timetags, or values.	No
<u>Example:</u> DATA_STOP		

Formatted: Justified

Deleted: - November 2014



## 6 NAVIGATION HARDWARE MESSAGE XML SYNTAX

### 6.1 OVERVIEW

XML instantiations of an NHM shall observe the syntax described in this chapter.

### 6.2 NHM LINES IN XML

6.2.1 Each NHM file shall consist of a set of NHM lines. Each NHM line shall be one of the following:

- XML version line;
- an XML-formatted line; or
- a blank line.

6.2.2 Each NHM line must not exceed 254 ASCII characters and spaces (excluding line termination character[s]).

6.2.3 Only printable ASCII characters and blanks shall be used. Control characters (such as TAB, etc.) shall not be used, with the exception of the line termination characters specified below.

6.2.4 Blank lines may be used at any position within the file. Blank lines shall have no assignable meaning, and may be ignored.

6.2.5 All lines shall be terminated by a single Carriage Return or a single Line Feed, or a Carriage Return/Line Feed pair or a Line Feed/Carriage Return pair.

### 6.3 NHM VALUES IN XML

6.3.1 Each obligatory XML tag must be present and contain a valid value.

6.3.2 Integer values shall follow the conventions of the integer data type per Reference [2]. Additional restrictions on the allowable range of values permitted for any integer data element may also be defined in the NHM XML Schema.

NOTE - Examples of such restrictions may include a defined range (e.g., 0 - 100, 1 - 10, etc.), a set of enumerated values (e.g., 0,1,2,4,8), a pre-defined specific variation such as positiveInteger, or a user-defined data type variation.

6.3.3 Non-integer numeric values may be expressed in either fixed-point or floating-point notation. Numeric values shall follow the conventions of the double data type per Reference [2]. Additional restrictions on the allowable range of values permitted for any numeric data element may also be defined in the NHM XML Schema.

NOTE - Examples of such restrictions may include a defined range (e.g., 0.0-100.0, etc.), or a user-defined data type variation.

Formatted: Normal, Level 2, Outline numbered + Level: 2 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.4" + Indent at: 0", Keep with next, Keep lines together

Formatted: Normal, Level 2, Outline numbered + Level: 2 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.4" + Indent at: 0", Keep with next, Keep lines together

Formatted: Normal, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0"

Formatted: Normal, Space Before: 9 pt

Formatted: Normal, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0"

Formatted: Normal, Level 2, Outline numbered + Level: 2 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.4" + Indent at: 0", Keep with next, Keep lines together

Formatted: Normal, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0"

Field Code Changed

Formatted: Normal, Indent: Left: 0", Hanging: 0.79", Keep lines together, Tab stops: 0.56", Left

Formatted: Normal, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0"

Deleted: 2].

Formatted: Normal, Indent: Left: 0", Hanging: 0.79", Keep lines together, Tab stops: 0.56", Left

Deleted: - November 2014

**6.3.4** Text value data shall follow the conventions of the string data type per Reference [2]. Additional restrictions on the allowable range or values permitted for any data element may also be defined in the NHM XML Schema.

NOTE – Examples of such restrictions may include a set of enumerated values (e.g., ‘YES’/‘NO’) or other user-defined data type variation.

**6.3.5** Text values in NHM/XML instantiations (i.e., the values between the opening and closing tags), shall consist of either all uppercase or all lowercase characters; an exception is made for values between the <COMMENT> and </COMMENT> tags, which may be in any case desired by the user. Otherwise, mixing of uppercase and lowercase characters is prohibited.

**6.3.6** In value fields that represent a time tag, values shall follow the conventions of the ndm: epochType data type used in all CCSDS NDM/XML schemas.

## 6.4 NHM UNITS IN XML

**6.4.1** Units are not explicitly displayed in the NHM. The units associated with values in the NHM must be defined in an ICD.

## 6.5 NHM COMMENTS IN XML

Comments are optional and must be displayed as values between the <COMMENT> and </COMMENT> tags. Comments may be in any case desired by the user.

Deleted: 2].

Formatted: Normal, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0"

Formatted: Normal, Indent: Left: 0", Hanging: 0.79", Keep lines together, Tab stops: 0.56", Left

Formatted: Normal, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0"

Commented [J3]: I'm not certain where the requirement that text values be either all uppercase or all lowercase came from. Does anyone know why this should be required? I don't.

Formatted: Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Keep with next, Keep lines together

Formatted: Font: Bold, All caps

Formatted: Normal, Level 2, Outline numbered + Level: 2 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.4" + Indent at: 0", Keep with next, Keep lines together

Formatted: Normal, Level 3, Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.5" + Indent at: 0", Keep with next, Keep lines together

Formatted: All caps

Formatted: Normal, Level 2, Outline numbered + Level: 2 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.4" + Indent at: 0", Keep with next, Keep lines together

Deleted: - November 2014

**ANNEX A**  
**IMPLEMENTATION CONFORMANCE**  
**STATEMENT PRO FORMA**  
**(NORMATIVE)**

**A1 INTRODUCTION**

**A1.1 OVERVIEW**

This annex provides the Implementation Conformance Statement (ICS) Requirements List (RL) for an implementation of Navigation Hardware Message (CCSDS 510.0). The ICS for an implementation is generated by completing the RL in accordance with the instructions below. An implementation shall satisfy the mandatory conformance requirements referenced in the RL.

- The RL in this annex is blank. An implementation's completed RL is called the ICS. The ICS states which capabilities and options have been implemented. The following can use the ICS:
- the implementer, as a checklist to reduce the risk of failure to conform to the standard through oversight;
- a supplier or potential acquirer of the implementation, as a detailed indication of the capabilities of the implementation, stated relative to the common basis for understanding provided by the standard ICS proforma;
- a user or potential user of the implementation, as a basis for initially checking the possibility of interworking with another implementation (it should be noted that, while interworking can never be guaranteed, failure to interwork can often be predicted from incompatible ICSes);
- a tester, as the basis for selecting appropriate tests against which to assess the claim for conformance of the implementation.

**A1.2 ABBREVIATIONS AND CONVENTIONS**

The RL consists of information in tabular form. The status of features is indicated using the abbreviations and conventions described below.

Item Column

The item column contains sequential numbers for items in the table.

Feature Column

The feature column contains a brief descriptive name for a feature. It implicitly means 'Is this feature supported by the implementation?'

Deleted: - November 2014

NOTE – The features itemized in the RL are elements of a NHM. Therefore support for a mandatory feature indicates that generated messages will include that feature, and support for an optional feature indicates that generated messages can include that feature. Keyword Column The keyword column contains, where applicable, the NHM keyword associated with the feature.

#### Reference Column

The reference column indicates the relevant subsection or table in Navigation Hardware Message(CCSDS 510.0) (this document).

#### Status Column

The status column uses the following notations: M mandatory. O optional.

#### Support Column Symbols

The support column is to be used by the implementer to state whether a feature is supported by entering Y, N, or N/A, indicating: Y Yes, supported by the implementation. N No, not supported by the implementation. N/A Not applicable.

### A1.3 INSTRUCTIONS FOR COMPLETING THE RL

An implementer shows the extent of compliance to the Recommended Standard by completing the RL; that is, the state of compliance with all mandatory requirements and the options supported are shown. The resulting completed RL is called an ICS. The implementer shall complete the RL by entering appropriate responses in the support or values supported column, using the notation described in A1.2. If a conditional requirement is inapplicable, N/A should be used. If a mandatory requirement is not satisfied, exception information must be supplied by entering a reference Xi, where i is a unique identifier, to an accompanying rationale for the noncompliance.

## A2 ICS PROFORMA FOR CONJUNCTION DATA MESSAGE

### A2.1 GENERAL INFORMATION

#### A2.1.1 Identification of ICS

<u>Date of Statement (DD/MM/YYYY)</u>	
<u>ICS serial number</u>	
<u>System Conformance statement cross-reference</u>	

Deleted: - November 2014

**A2.1.2 Identification of Implementation Under Test (IUT)**

<u>Implementation name</u>	
<u>Implementation version</u>	
<u>Special Configuration</u>	
<u>Other Information</u>	

**A2.1.3 Identification of Supplier**

<u>Supplier</u>	
<u>Contact Point for Queries</u>	
<u>Implementation Name(s) and Versions</u>	
<u>Other information necessary for full identification, e.g., name(s) and version(s) for machines and/or operating systems; System Name(s)</u>	

**A2.1.4 Document Version**

<u>CCSDS 508.0 Document Version</u>	
<u>Have any exceptions been required?</u>  (Note: A YES answer means that the implementation does not conform to the Recommended Standard. Non-supported mandatory capabilities are to be identified in the ICS, with an explanation of why the implementation is non-conforming.)	Yes _____ No _____

Deleted: - November 2014

| [A2.1.5 Requirements List](#)

Deleted: - November 2014



<u>Item</u>	<u>Feature</u>	<u>Keyword</u>	<u>Reference</u>	<u>Status</u>	<u>Support</u>
<u>1</u>	NHM Header	N/A	<u>3.1.5 a, 3.2.1</u>	<u>M</u>	
<u>1.1</u>	NHM Version	<u>CCSDS_NHM_VERS</u>	<u>3.2.2 a, 5.2.1, 5.2.2</u>	<u>M</u>	
<u>1.2</u>	Creation Date	<u>CREATION_DATE</u>	<u>3.2.2 b, 5.2.3, 5.2.4</u>	<u>M</u>	
<u>1.2.1</u>	Time Format	N/A	<u>5.1.3</u>	<u>M</u>	
<u>1.3</u>	Originator	<u>ORIGINATOR</u>	<u>3.2.2 c, 5.2.5, 5.2.6</u>	<u>M</u>	
<u>1.4</u>	Header Line Order	N/A	<u>3.2.3</u>	<u>M</u>	
<u>1.5</u>	Comment	<u>COMMENT</u>	<u>3.2.4, 5.1.2</u>	<u>O</u>	
<u>2</u>	NHM Metadata	N/A	<u>3.1.5 b, 3.3.1</u>	<u>M</u>	
<u>2.1</u>	Start	<u>META_START</u>	<u>3.3.1 a, 5.3.1, 5.3.2</u>	<u>M</u>	
<u>2.2</u>	Time System	<u>TIME_SYSTEM</u>	<u>3.3.1 b, 5.3.3, 5.3.4</u>	<u>M</u>	
<u>2.3</u>	Spacecraft Name	<u>OBJECT_NAME</u>	<u>3.3.1 c, 5.3.5</u>	<u>M</u>	
<u>2.4</u>	Spacecraft ID	<u>OBJECT_ID</u>	<u>3.3.1 d, 5.3.7</u>	<u>M</u>	
<u>2.5</u>	Start time of data	<u>START_TIME</u>	<u>3.3.1 e, 5.3.9, 5.3.10</u>	<u>M</u>	
<u>2.6</u>	Stop time of data	<u>STOP_TIME</u>	<u>3.3.4 c, 5.3.11, 5.3.12</u>	<u>O</u>	
<u>2.7</u>	Comment	<u>COMMENT</u>	<u>3.3.4 a</u>	<u>O</u>	
<u>2.8</u>	Define Block	N/A	<u>3.3.1 f, 5.3.13, 5.3.14</u>	<u>M</u>	
<u>2.8.1</u>	Define Line	<u>DEFINE</u>	<u>3.3.5, 5.3.15</u>	<u>M</u>	
<u>2.8.1.1</u>	Mnemonic Keyword	N/A	<u>5.3.16</u>	<u>M</u>	
<u>2.8.1.2</u>	System Field	N/A	<u>5.3.16.1</u>	<u>M</u>	
<u>2.8.1.2</u>	Hardware Type Field	N/A	<u>5.3.16.2</u>	<u>M</u>	
<u>2.8.1.3</u>	Data Group Field	N/A	<u>5.3.16.3, 5.3.16.4</u>	<u>M</u>	
<u>2.8.1.4</u>	Measurement Count Field	N/A	<u>5.3.16.5</u>	<u>M</u>	
<u>2.8.1.5</u>	Measurement Type Field	N/A	<u>5.3.16.6</u>	<u>O</u>	
<u>2.8.2</u>	Comments	<u>COMMENT</u>	<u>3.3.4 b, 3.3.6</u>	<u>O</u>	
<u>2.9</u>	Metadata Order	N/A	<u>3.3.3</u>	<u>M</u>	
<u>2.10</u>	Metadata stop	<u>META_STOP</u>	<u>3.3.2 g, 5.3.17, 5.3.18</u>	<u>M</u>	
<u>3</u>	NHM Data	N/A	<u>3.1.5 c, 3.4.1</u>	<u>M</u>	

Deleted: - November 2014

<u>3.1</u>	<u>Data Start</u>	<u>DATA_START</u>	<u>3.4.2 a, 5.4.1, 5.4.2</u>	<u>M</u>	
<u>3.2</u>	<u>Data Lines</u>	<u>Keyword must be one of those defined in a Define Block in the Metadata</u>	<u>5.4.3, 5.4.4, 5.4.5</u>	<u>M</u>	
<u>3.3</u>	<u>Comment</u>	<u>COMMENT</u>	<u>3.4.3 a</u>	<u>O</u>	
<u>3.4</u>	<u>Data Stop</u>	<u>DATA_END</u>	<u>3.4.3 b, 5.4.6, 5.4.7</u>	<u>O</u>	

Deleted: - November 2014

**ANNEX B**

**VALUES FOR THE TIME\_SYSTEM  
KEYWORD**

**(NORMATIVE)**

The values in this annex represent the set of acceptable values for the TIME\_SYSTEM keyword. For details and description of these time systems, see Reference H2. If exchange partners wish to use different settings, they should be documented in the ICD.

**Table B-3: Normative Values for TIME\_SYSTEM Metadata Keyword**

Time System Value	Meaning
GMST	Greenwich Mean Sidereal Time
GPS	Global Positioning System
MET	Mission Elapsed Time
	Note: Mission Elapsed time is the time in normal time units since the mission start.
SCLK	Spacecraft Clock
	Note: Spacecraft Clock time is the number of counts that have occurred on a spacecraft clock (with each count representing a specific time increment) since the clock was last reset. Before use, Spacecraft Clock times must be converted into a universally usable time system but, since the spacecraft sometime tags data with internal Spacecraft Clock times it may occur in the NHM.
TAI	International Atomic Time
TT	Terrestrial Time
UT1	Universal Time
UTC	Coordinated Universal Time

Deleted: Table 6-1

Deleted: ¶

Formatted: Table Cell

Deleted: - November 2014



**ANNEX C**  
**SECURITY, SANA AND PATENT**  
**CONSIDERATIONS**  
**(INFORMATIVE)**

**C1 SECURITY CONSIDERATIONS**

**C1.1 ANALYSIS OF SECURITY CONSIDERATIONS**

This section presents the results of an analysis of security considerations applied to the technologies specified in this Proposed Standard.

**C1.2 CONSEQUENCES OF NOT APPLYING SECURITY TO THE TECHNOLOGY**

The consequences of not applying security to the systems and networks on which this Proposed Standard is implemented could include potential loss, corruption, and theft of data. Because these messages are used in orbit determination and attitude determination, the consequences of not applying security to the systems and networks on which this Proposed Standard is implemented could include compromise or loss of the mission if malicious tampering of a particularly severe nature occurs.

**C1.3 POTENTIAL THREATS AND ATTACK SCENARIOS**

Potential threats or attack scenarios include, but are not limited to, (a) unauthorized access to the programs/processes that generate and interpret the messages, and (b) unauthorized access to the messages during transmission between exchange partners. Protection from unauthorized access during transmission is especially important if the mission utilizes open ground networks such as the Internet to provide ground station connectivity for the exchange of data formatted in compliance with this Proposed Standard. It is strongly recommended that potential threats or attack scenarios applicable to the systems and networks on which this Proposed Standard is implemented be addressed by the management of those systems and networks.

**C1.4 DATA PRIVACY**

Privacy of data formatted in compliance with the specifications of this Proposed Standard should be assured by the systems and networks on which this Proposed Standard is implemented.

**C1.5 DATA INTEGRITY**

Integrity of data formatted in compliance with the specifications of this Proposed Standard should be assured by the systems and networks on which this Proposed Standard is implemented.

Deleted: - November 2014

## C1.6 AUTHENTICATION OF COMMUNICATING ENTITIES

Authentication of communicating entities involved in the transport of data which complies with the specifications of this Proposed Standard should be provided by the systems and networks on which this Proposed Standard is implemented.

## C1.7 DATA TRANSFER BETWEEN COMMUNICATING ENTITIES

The transfer of data formatted in compliance with this Proposed Standard between communicating entities should be accomplished via secure mechanisms approved by the Information Technology Security functionaries of exchange participants.

## C1.8 CONTROL OF ACCESS TO RESOURCES

Control of access to resources should be managed by the systems upon which originator formatting and recipient processing are performed.

## C1.9 AUDITING OF RESOURCE USAGE

Auditing of resource usage should be handled by the management of systems and networks on which this Proposed Standard is implemented.

## C1.10 UNAUTHORIZED ACCESS

Unauthorized access to the programs/processes that generate and interpret the messages should be prohibited in order to minimize potential threats and attack scenarios.

## C1.11 DATA SECURITY IMPLEMENTATION SPECIFICS

Specific information-security interoperability provisions that may apply between agencies and other independent users involved in an exchange of data formatted in compliance with this Proposed Standard should be specified in an ICD.

## C2 SANA CONSIDERATIONS

The following NHM-related items will be registered with the SANA operator. The registration rule for new entries is the approval of new requests by the CCSDS Navigation Working Group chair.

### C2.1 XML

The NHM XML schema will be registered with the SANA. New requests for this registry should be sent to SANA (mailto:info@sanaregistry.org).

Commented [JAH4]: (From KR) NOTE: sensors & units question-registering eg. new sensors, sensor data types

### C2.2 HARDWARE TYPES AND UNITS

Registered values for the Mnemonic Keyword System Field, Hardware Type Field, and Measurement Type Field will be registered with SANA. New requests for this registry should be sent to SANA (mailto:info@sanaregistry.org).

Deleted: - November 2014

Note: See Table D-1 for examples.

### **C3 PATENT CONSIDERATIONS**

The recommendations of this document have no patent issues.





**ANNEX D**  
**VALUES FOR DEFINE KEYWORD**  
**(INFORMATIVE)**

The values in this annex represent examples of values associated with three fields of the Mnemonic Keywords defined in the records of the Metadata Section with the DEFINE keyword. The complete list of normative values will be contained in a SANA registry.

An example of this table in the SANA registry is given as Table D-1 below.

Each entry (row) of the table will contain the following columns:

The first column (“Value”) contains values that would appear in the SANA registry table.

The second column (“Type and Field Within Value of DEFINE Lines”) identifies the type or field for the value as described in Table 5-1. The different types or fields are:

1. **System:** Entries marked “System Field” contain the values that will be used in the System Field of a Mnemonic Keyword defined with the Define line in the Metadata section. It indicates the spacecraft system concerned with the data on Data Lines in the Data Section. Because different spacecraft systems may be concerned with the same hardware the same data, in different messages, may be associated with different systems, depending on the intended use of the message.
2. **Hardware:** Entries marked “Hardware Type” indicate the particular spacecraft hardware associated with particular data. The values of Hardware Types will appear in the Hardware Type Field of a Mnemonic Keyword defined with the Define line in the Metadata section. Since there are often several instances of a particular type of hardware on a spacecraft the Hardware Type Field in the Mnemonic will also include a numeric designator of the instance of the hardware. Some “Hardware Types” do not correspond to actual hardware but represent combinations of processed hardware data such as output from the Onboard Computer (Type is “OBC”).
3. **Measurement:** Entries marked “Measurement Type” indicate one of the few forms in which measurements will appear. The values of Measurement Types may appear in the optional Measurement Type Field of a Mnemonic defined with the Define line in the Metadata section.

The third column of Table D-1 (“Meaning”) contains a brief description of the significance of the Measurement. The fourth column of Table D-1 (“Description”) shows (where relevant) the type of physical quantity represented by the measurement or other information on the use of the Measurement Field.

The fifth and last column of Table D-1 (“Examples of Units”) shows typical units in which Measurements of a particular type are represented. An ICD should be used to specify which of the units are used in any message.

Deleted: Value

Deleted: Measurement Type

Deleted: m

Deleted: - November 2014

**Table D-1: Example of a SANA Registry Table Containing Values Associated with the DEFINE Keyword in the Metadata Section**

Value	Mnemonic Keyword Field	Meaning	Description	Examples of Units
ACS	System Field	Attitude Control System (Attitude Determination and Control)		
CDH	System Field	Command and Data Handling System		
COM	System Field	Communications		
NAV	System Field	Navigation		
PWR	System Field	Power		
PRP	System Field	Propulsion		
THM	System Field	Thermal		
STA	Hardware Type	Star Tracker	star direction (and intensity)	counts, deg, rad (magnitude units)
AST	Hardware Type	Autonomous Star Tracker	star tracker attitude	no units
DSS	Hardware Type	Digital Sun Sensor	Sun position	counts, deg, rad
CSS	Hardware Type	Coarse Sun Sensor	Angle from Sun	counts, mA, deg, rad
IRU	Hardware Type	Inertial Reference Unit	attitude rates. accumulated angles	counts, deg, rad, deg/s, rad/s, arcsec/s
ACC	Hardware Type	Accelerometer	accelerations	m/s <sup>2</sup>
GNS	Hardware Type	Global Navigation System Receiver	Pseudorange to GNSS satellite, position, velocity	km, km/s, m, m/s
THR	Hardware Type	Thruster	Pulse count, tank pressure	counts
OBC	Hardware Type	On Board Computed	Any values that are computed onboard from hardware data such as attitude, position, velocity, etc,	various
ANT	Hardware Type	Antenna	Receiver Power	dB
I	Measurement Type	Integer		
F	Measurement	Fixed Point Number	Includes a	

Deleted: Data Type  
Formatted Table

Commented [J5]: I've never used Accelerometer myself. Could someone who has used them give me other units that they commonly report in?

Deleted: - November 2014

	Type		<u>decimal point and may include a sign symbol (+ or -)</u>	
E	Measurement Type	Exponential Notation Number	<u>Similar to F but contains an exponent field as Esdd where s is an optional sign and d is a digit.</u>	
B	Measurement Type	Binary Value	<u>0 or 1</u>	
C	Measurement Type	Character String	<u>May start and end with a quotation mark which is ignored in interpreting the measurement but quotation marks must be used if the measurement contains blank spaces.</u>	

**Commented [J6]:** The definition I had given is fine for binary quality flags but not for all binary flags. I've given a rationale for not including the definitions of 0 and 1 in the CRM. The binary values could be instrument on/off, high range/low range so true/false is too restrictive. The definition I had given is fine for binary quality flags but not for all binary flags.

**Deleted:** - November 2014



**ANNEX E**

**EXAMPLE NAVIGATION HARDWARE  
MESSAGE MNEMONIC KEYWORDS  
WITH CORRESPONDING ICD  
INFORMATION**

**(INFORMATIVE)**

**Table E-1: Example of Information Used in Creating an NHM that Should Be Included in an ICD**

Mnemonic Keyword	Information in ICD	Required
ACS.CSS1.EYECURRENT.V5.I4B	Definitions of "eyecurrent"	Yes
	Conversion factors for converting counts to engineering units	No
	Mounting vector for each of the four eyes	No
	<a href="#">Definition of Binary flag</a>	Yes
THM.AST1.TEMP.V3	Definition of TEMP	Yes
	Conversion of values to temperatures	Yes
	Location of sensors	No
ACS.OBC1.QUAT.V5.F4B	Definition of QUAT <a href="#">including relevant frames, rotation directions, and the identity of the scalar component.</a>	Yes
	<a href="#">Definition of Binary flag</a>	Yes

Merged Cells  
Formatted Table

Explanation of ACS.CSS1.EYECURRENT.V5.I4B

The data associated with this Mnemonic Keyword in this example is associated with Coarse Sun Sensor 1 (CSS1). CSS1 consists of 4 photocells each of which reports a current that is related to the angle between the eye normal and the Sun direction. The currents are transmitted in counts. The usable processed data from CSS1 is the Sun direction in the body frame. In order to obtain this direction the counts must first be converted to currents and the currents then converted to angles from the corresponding eye normal directions. These angles, together with the eye normal directions in the body frame can be used to determine the Sun direction in the body frame. The binary Quality Flag distinguishes between Valid and Invalid measurements.

Explanation of THM.AST1.TEMP.V3

Deleted: - November 2014

The data associated with this Mnemonic Keyword consists of temperature readings at three locations on AST1. Each reading is transmitted as a voltage and a conversion from volts to degrees C is needed for their use. The location of each temperature sensor is useful (e.g. instrument lens, instrument body, instrument photocell).

Deleted:

Deleted:

#### Explanation of ACS.OBC1.QUAT.V5.F4B

The data associated with this Mnemonic Keyword consists of quaternions computed by the onboard computer, using data from attitude sensors. It is the onboard estimate of the attitude. It specifies the rotation of one frame relative to another (typically a body frame relative to an inertial frame). The binary Quality Flag distinguishes between Valid and Invalid measurements.

Deleted: -----Section Break (Next Page)-----

Deleted: - November 2014

**ANNEX F**  
**EXAMPLE NAVIGATION HARDWARE**  
**MESSAGES**  
**(INFORMATIVE)**

**Deleted:** PROPOSED CCSDS RECOMMENDED STANDARD FOR NAVIGATION HARDWARE MESSAGE  
EXAMPLE NAVIGATION HARDWARE MESSAGES (CONTINUED)

```
CCSDS_NHM_VERS = 1.0
COMMENT This is fictitious data for a very simple spacecraft
CREATION_DATE = 2012-11-27T09:55:31
ORIGINATOR = NASA

META_START
TIME_SYSTEM = UTC
OBJECT_NAME = STS106
OBJECT_ID = 2000-053A
START_TIME = 2009-06-49T4.:00:00Z
DEFINE = ACS.TAM1.FIELD.V4.I3B
COMMENT Three axis magnetometer detected field in counts and a quality flag
COMMENT Three axis magnetometer data is expressed in the TAM1 Frame (see ICD)
COMMENT Three axis magnetometer data is in counts that may be converted to milligauss by a linear transfer function
DEFINE = ACS.STA2.STAR1.V4.I3B
COMMENT Star tracker 1, First Star. Horizontal and Vertical positions and Intensity in counts and a quality flag
DEFINE = ACS.STA2.STAR2.V4.I3B
COMMENT Star tracker 1, Second Star. Horizontal and Vertical positions and Intensity in counts and a quality flag
DEFINE = ACS.IRU1.RATES.V4.I3B
COMMENT Gyro rates for IRU assembly-1 3 axes in counts and a quality flag in the Body Frame
DEFINE = THM.IRU1.TEMPV.V4.F6B
DEFINE = ACS.OBC1.QUAT.V5.F4B
COMMENT Onboard computed Quaternions as EME2000 inertial frame to body frame and a quality flag
META_STOP
DATA_START
COMMENT The data values are not real in this example
ACS.IRU1.RATES.V4.I3B = 2009-06-49T07:15:00.6Z 18312 191 57637 0
ACS.STA1.STAR1.V4.I3B = 2009-06-49T07:15:00.7Z 12778 -4069 82 0
ACS.STA1.STAR2.V4.I3B = 2009-06-49T07:15:00.7Z 9200 4565 81 0
ACS.IRU1.RATES.V4.I3B = 2009-06-49T07:15:01.0Z 18767 29 57295 0
ACS.STA2.STAR1.V4.I3B = 2009-06-49T07:15:01.1Z 4495 4834 78 0
ACS.STA2.STAR2.V4.I3B = 2009-06-49T07:15:01.1Z 27180 6367 89 0
ACS.OBC1.QUAT.V5.F4B = 2009-06-49T07:15:01.4Z 0.8619094 0.5002867 0.0472852 0.0677461 0
ACS.IRU1.RATES.V4.I3B = 2009-06-49T07:15:01.6Z 18704 64126 56639 0
ACS.STA2.STAR1.V4.I3B = 2009-06-49T07:15:01.9Z 4663 5257 78 0
ACS.STA2.STAR2.V4.I3B = 2009-06-49T07:15:01.9Z 25079 6678 89 0
ACS.TAM1.FIELD.V4.I3B = 2009-06-49T07:15:02.6Z 5527 -1596 -21298 0
DATA_STOP
```

**Formatted:** Line spacing: At least 13 pt

**Formatted:** Font: 9 pt

**Deleted:** \_\_\_\_\_Page Break\_\_\_\_\_

**Deleted:** - November 2014





## ANNEX G

### NHM EXAMPLE IN XML FORMAT

#### (INFORMATIVE)

The following is a sample of an NHM in XML format. Note that some of the lines wrap in this representation, but would not wrap in an actual NHM file given the 254 character line length.

```
<?xml version="1.0" encoding="UTF-8"?>
<nhm xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://sanaregistry.org/r/ndmxml/ndmxml-1.0-
master.xsd" id="CCSDS_NHM_VERS" version="1.0">
  <header>
    <COMMENT>This is NHM Annex F KVN example expressed in XML</COMMENT>
    <COMMENT>This is fictitious data for a very simple spacecraft</COMMENT>
    <CREATION_DATE>2012-11-27T09:55:31</CREATION_DATE>
    <ORIGINATOR>NASA</ORIGINATOR>
  </header>
  <body>
    <segment>
      <metadata>
        <TIME_SYSTEM>UTC</TIME_SYSTEM>
        <OBJECT_NAME>STS106</OBJECT_NAME>
        <OBJECT_ID>2000-053A</OBJECT_ID>
        <START_TIME>2009-06-29T07:15:00.6Z</START_TIME>
        <STOP_TIME>2009-06-29T07:15:02.6Z</STOP_TIME>
      <defineBlock>
        <DEFINE>ACS.TAM1.FIELD.V4.I3B</DEFINE>
        <COMMENT>Three axis magnetometer detected field in counts and a
quality flag</COMMENT>
        <COMMENT>Three axis magnetometer data is expressed in the TAM1
Frame (see ICD)</COMMENT>
        <COMMENT>Three axis magnetometer data is in counts that may be
converted to milligauss by a linear transfer function</COMMENT>
      </defineBlock>
      <defineBlock>
        <DEFINE>ACS.STA1.STAR1.V4.I3B</DEFINE>

```

Deleted: PROPOSED CCSDS RECOMMENDED STANDARD FOR NAVIGATION HARDWARE MESSAGE  
EXAMPLE NAVIGATION HARDWARE MESSAGES (CONTINUED)

Deleted: :

Deleted: w.10

Deleted: Set

Deleted: Set

Deleted: Set

Deleted: - November 2014

Deleted: PROPOSED CCSDS RECOMMENDED STANDARD FOR NAVIGATION HARDWARE MESSAGE  
EXAMPLE NAVIGATION HARDWARE MESSAGES (CONTINUED)

```
<COMMENT>Star tracker 1, First Star. Horizontal and Vertical
positions and Intensity in counts and a quality flag</COMMENT>
</defineBlock>
<defineBlock>
  <DEFINE>ACS.STA1.STAR2.V4.I3B</DEFINE>
  <COMMENT>Star tracker 1, Second Star. Horizontal and Vertical
positions and Intensity in counts and a quality flag</COMMENT>
</defineBlock>
<defineBlock>
  <DEFINE>ACS.IRU1.RATES.V4.I3B</DEFINE>
  <COMMENT>Gyro rates for IRU assembly-1 3 axes in counts and a
quality flag in the Body Frame</COMMENT>
</defineBlock>
<defineBlock>
  <DEFINE>THM.IRU1.TEMP.V4.F6B</DEFINE>
</defineBlock>
<defineBlock>
  <DEFINE>ACS.OBC1.QUAT.V4.F4B</DEFINE>
  <COMMENT>Onboard computed Quaternions as EME2000 inertial frame
to body frame and a quality flag</COMMENT>
</defineBlock>
</metadata>
<data>
  <COMMENT>The data values are not real in this example</COMMENT>
  <hardwareDataRecord>
    <keyword>ACS.IRU1.RATES.V4.I3B</keyword>
    <timetag>2009-06-29T07:15:00.6Z</timetag>
    <measurement>18312</measurement>
    <measurement>191</measurement>
    <measurement>57637</measurement>
    <measurement>0</measurement>
  </hardwareDataRecord>
  <hardwareDataRecord>
    <keyword>ACS.STA1.STAR1.V4.I3B</keyword>
    <timetag>2009-06-29T07:15:00.7Z</timetag>
    <measurement>12778</measurement>
    <measurement>-4069</measurement>
    <measurement>82</measurement>
    <measurement>0</measurement>
  </hardwareDataRecord>
  <hardwareDataRecord>
```

Deleted: Set

Deleted: Set

Deleted: Set

Deleted: Set

Deleted: Set

Deleted: Set

Deleted: Set

Deleted: Set

Deleted: Set

Deleted: MNEMONIC

Deleted: MNEMONIC

Deleted: EPOCH

Deleted: EPOCH

Deleted: MNEMONIC

Deleted: MNEMONIC

Deleted: EPOCH

Deleted: EPOCH

Deleted: - November 2014

Deleted: PROPOSED CCSDS RECOMMENDED STANDARD FOR NAVIGATION HARDWARE MESSAGE  
EXAMPLE NAVIGATION HARDWARE MESSAGES (CONTINUED)

```
<keyword>ACS.STA1.STAR2.V4.I3B</keyword>  
<timetag>2009-06-29T07:15:00.7Z</timetag>  
<measurement>9200</measurement>  
<measurement>4565</measurement>  
<measurement>81</measurement>  
<measurement>0</measurement>
```

Deleted: MNEMONIC  
Deleted: MNEMONIC  
Deleted: EPOCH  
Deleted: EPOCH

```
</hardwareDataRecord>  
<hardwareDataRecord>  
<keyword>ACS.IRUL.RATES.V4.I3B</keyword>  
<timetag>2009-06-29T07:15:01.0Z</timetag>  
<measurement>18767</measurement>  
<measurement>29</measurement>  
<measurement>57295</measurement>  
<measurement>0</measurement>
```

Deleted: MNEMONIC  
Deleted: MNEMONIC  
Deleted: EPOCH  
Deleted: EPOCH

```
</hardwareDataRecord>  
<hardwareDataRecord>  
<keyword>ACS.STA1.STAR1.V4.I3B</keyword>  
<timetag>2009-06-29T07:15:01.1Z</timetag>  
<measurement>4495</measurement>  
<measurement>4834</measurement>  
<measurement>78</measurement>  
<measurement>0</measurement>
```

Deleted: MNEMONIC  
Deleted: MNEMONIC  
Deleted: EPOCH  
Deleted: EPOCH

```
</hardwareDataRecord>  
<hardwareDataRecord>  
<keyword>ACS.STA1.STAR2.V4.I3B</keyword>  
<timetag>2009-06-29T07:15:01.1Z</timetag>  
<measurement>27180</measurement>  
<measurement>6367</measurement>  
<measurement>89</measurement>  
<measurement>0</measurement>
```

Deleted: MNEMONIC  
Deleted: MNEMONIC  
Deleted: EPOCH  
Deleted: EPOCH

```
</hardwareDataRecord>  
<hardwareDataRecord>  
<keyword>ACS.OBC1.QUAT.V4.F4B</keyword>  
<timetag>2009-06-29T07:15:01.4Z</timetag>  
<measurement>0.8619094</measurement>  
<measurement>0.5002867</measurement>  
<measurement>0.0472852</measurement>  
<measurement>0.0677461</measurement>  
<measurement>0</measurement>
```

Deleted: MNEMONIC  
Deleted: MNEMONIC  
Deleted: EPOCH  
Deleted: EPOCH

```
</hardwareDataRecord>
```

Deleted: - November 2014

```

<hardwareDataRecord>
  <keyword>ACS.IRU1.RATES.V4.I3B</keyword>
  <timetag>2009-06-29T07:15:01.6Z</timetag>
  <measurement>18704</measurement>
  <measurement>64126</measurement>
  <measurement>56639</measurement>
  <measurement>0</measurement>
</hardwareDataRecord>
<hardwareDataRecord>
  <keyword>ACS.STA1.STAR1.V4.I3B</keyword>
  <timetag>2009-06-29T07:15:01.9Z</timetag>
  <measurement>4663</measurement>
  <measurement>5257</measurement>
  <measurement>78</measurement>
  <measurement>0</measurement>
</hardwareDataRecord>
<hardwareDataRecord>
  <keyword>ACS.STA1.STAR2.V4.I3B</keyword>
  <timetag>2009-06-29T07:15:01.9Z</timetag>
  <measurement>25079</measurement>
  <measurement>6678</measurement>
  <measurement>89</measurement>
  <measurement>0</measurement>
</hardwareDataRecord>
<hardwareDataRecord>
  <keyword>ACS.TAM1.FIELD.V4.I3B</keyword>
  <timetag>2009-06-29T07:15:02.6Z</timetag>
  <measurement>5527</measurement>
  <measurement>-1596</measurement>
  <measurement>-21298</measurement>
  <measurement>0</measurement>
</hardwareDataRecord>
</data>
</segment>
</body>
</nhm>

```

Deleted: PROPOSED CCSDS RECOMMENDED STANDARD FOR NAVIGATION HARDWARE MESSAGE  
 EXAMPLE NAVIGATION HARDWARE MESSAGES (CONTINUED)

Deleted: MNEMONIC

Deleted: MNEMONIC

Deleted: EPOCH

Deleted: EPOCH

Deleted: MNEMONIC

Deleted: MNEMONIC

Deleted: EPOCH

Deleted: EPOCH

Deleted: MNEMONIC

Deleted: MNEMONIC

Deleted: EPOCH

Deleted: EPOCH

Deleted: MNEMONIC

Deleted: MNEMONIC

Deleted: EPOCH

Deleted: EPOCH

Deleted: - November 2014

**ANNEX H**  
**INFORMATIVE REFERENCES**  
**(INFORMATIVE)**

NOTE – Normative References are provided in section 1.7.

- [H1] *Organization and Processes for the Consultative Committee for Space Data Systems*. "CCSDS A02.1-Y-4. Yellow Book. Issue 4. Washington, D.C.: CCSDS, April 2014.
- [H2] *Navigation Data—Definitions and Conventions*. Report Concerning Space Data System Standards, CCSDS 500.0-G-3. Green Book. Issue 3. Washington, D.C.: CCSDS, November 2010.
- [H3] *Astrodynamics – Propagation Specifications, Technical Definitions, and Recommended Practices*, ANSI/AIAA S-131-2010, Reston, VA: American Institute of Aeronautics and Astronautics, 2010, [http://astrodynamicstandards.com/Resources/ANSI\\_AIAA\\_S-131-2010.pdf](http://astrodynamicstandards.com/Resources/ANSI_AIAA_S-131-2010.pdf)



**ANNEX I**

**NAVIGATION HARDWARE MESSAGE  
GOALS AND REQUIREMENTS**

**(INFORMATIVE)**

The Navigation Hardware Message is intended to facilitate the use of navigation hardware data in ground monitoring, validation, and analysis of spacecraft navigation performance. Its use is expected to reduce from mission to mission the amount of software modification necessary to transmit and receive navigation hardware data. It is also expected to allow visual examination of the text of the message to provide easy understanding of the nature of any data in the message.

For a single mission, multiple Navigation Hardware Messages may be desired for different users. For example:

- An Attitude NHM containing the output of attitude sensors and the results of their onboard processing (such as onboard attitude estimates, rate biases, etc.) sent to the attitude validation team.
- An Orbit NHM containing output of orbit determination hardware (e.g. GPS receivers, accelerometers, thrusters, etc) and the results of any onboard orbit processing sent to the orbit determination team.
- A Health and Safety Monitoring NHM containing output of any onboard hardware or results of hardware processing that are needed for monitoring the spacecraft navigation systems health and safety (e.g. temperatures, pressures, battery charge, hardware status) sent to the mission operations Team.

It is expected that the data in various messages might not be exclusive. For example, both the Attitude NHM and the Health and Safety Monitoring NHM could contain data on the status of attitude hardware.

For each NHM it is expected that:

- Identical (or at least similar) forms will be used for corresponding data from different missions.
- Mnemonic Keywords will be constructed to be as clear as possible.
- ICDs will be used to describe the contents of each type of Hardware Data Record.

A specification of requirements agreed to by all parties is essential to focus design and to ensure the product meets the needs of the Member Agencies and satellite operators. There are many ways of organizing requirements, but the categorization of requirements is not as important as the agreement to a sufficiently comprehensive set. In this section the requirements are organized into two categories:

Deleted: i

PROPOSED CCSDS RECOMMENDED STANDARD FOR NAVIGATION HARDWARE MESSAGE

- Primary Requirements: These are the most elementary and necessary requirements. They would exist no matter the context in which the CCSDS is operating, i.e., regardless of pre-existing conditions within the CCSDS, its Member Agencies, or other independent users.
- Desirable Characteristics: These are not requirements, but they are felt to be important or useful features of the Recommended Standard.

**Table I-1: Primary Requirements**

ID	Requirement	Rationale	Trace
NHM-P01	The NHM data shall be provided in digital form (computer file or stream).	Facilitates computerized processing of NHMs	<a href="#">3.1.7</a>
NHM-P02	The NHM shall be provided in data structures (e.g., files) that are readily ported between, and useable within, 'all' computing environments in use by Member Agencies.	The CCSDS objective of promoting interoperability is not met if messages are produced using esoteric or proprietary data structures.	<a href="#">3.1.1</a>
NHM-P03	The NHM shall provide a mechanism by which messages may be uniquely identified and clearly annotated. The file name alone is considered insufficient for this purpose.	Facilitates discussion between a message recipient and the originator should it become necessary.	<a href="#">3.2</a>
NHM-P04	The NHM shall provide time measurements (time stamps, or epochs) in commonly used, clearly specified systems.	The CCSDS objective of promoting interoperability is not met if time measurements are produced in esoteric or proprietary time systems	<a href="#">3.3.2 b</a>
NHM-P05	The NHM shall be provided in, or shall include, an ASCII format.	ASCII character-based messages promote interoperability. ASCII messages are useful in transferring data between heterogeneous computing systems, because the ASCII character set is nearly universally used and is interpretable by all popular systems. In addition, direct human-readable dumps of text to displays, emails, documents or	3.1.1, 4.1, 6.2.3

Deleted: Table 6-2

Formatted Table

Deleted: 3.1.1

Deleted: 6

Deleted: Table 3-1

Deleted: Table 3-2, Annex B

Formatted Table



PROPOSED CCSDS RECOMMENDED STANDARD FOR NAVIGATION HARDWARE MESSAGE

ID	Requirement	Rationale	Trace
		printers are possible without preprocessing.	
NHM-P06	The NHM shall not require software supplied by other Agencies.	This principle was agreed upon early in the history of the CCSDS Navigation Working Group.	n/a
NHM-P07	The NHM shall provide data for a single spacecraft.	Data from multiple spacecraft would be confusing and the specific hardware from which the data arises will be on a single spacecraft.	<a href="#">3.3.2 c</a>
NHM-P08	The single spacecraft to which an NHM applies shall be clearly identified.	Identifies the spacecraft from which the data originated.	<a href="#">3.3.2 c and d</a>
NHM-P09	The source (hardware) from which data in lines in the NHM Data Section originate shall be clearly identified.	Identifies the subsystem and hardware from which the data originated.	<a href="#">3.3.2 e</a>
NHM-P10	The NHM shall have an XML representation.	CCSDS CMC requires such a representation for Navigation WG standards	Sections 4 and 6
NHM-P11	The NHM shall have the ability to dynamically configure the input.	The large number and constantly varying types of navigation hardware data require a dynamic configuration to prevent constant updating of the standard as hardware changes.	<a href="#">3.3.2 e</a>
NHM-P12	The NHM shall be readable by both humans and computers.	If humans can easily read the message, specialized software to decode the message is not necessary.	3.1.1, <del>6.2.3</del>

**Table 4: Desirable Characteristics**

ID	Requirement	Rationale	Trace
NHM-D01	An ICD should be agreed upon between participants in NHM exchanges.	Issues such as naming conventions, units, and specification of hardware types and characteristics are too diverse to be specified in a standard. Use of an ICD allows flexibility within the standard.	<a href="#">3.1.9, Annex E</a>

Formatted Table

Deleted: 3.1.5

Deleted: Table

Deleted: -

Deleted: OBJECT\_NAME

Deleted: OBJECT\_ID

Deleted: Table

Deleted: -

Deleted: DEFINE Keyword

Formatted Table

Deleted: 5.

Deleted: 5.2.2,

Deleted: Table 6-3

Formatted Table

Deleted: 3.1.8,

Deleted: D

PROPOSED CCSDS RECOMMENDED STANDARD FOR NAVIGATION HARDWARE MESSAGE

ID	Requirement	Rationale	Trace
NHM-D02	The NHM should be extensible with no disruption to existing users/uses.	Space agencies and operators upgrade systems and processes on schedules that make sense for their organizations. In practice, some organizations will be early adopters but others will opt to wait until performance of a new version of the NHM has been proven in other operations facilities.	<a href="#">3.2.1 a</a>
NHM-D03	The NHM should be as consistent as reasonable with any related CCSDS Recommended Standards used for spacecraft-to-earth applications.	Ideally, the set of Recommended Standards developed by a given CCSDS Working Group will be consistent.	n/a

Formatted Table


Deleted: Table 3-1 (CCSDS\_NHM\_VERS keyword)

Formatted Table

ANNEX J

GRAPHICAL REPRESENTATION OF  
NHM IN KVN

(INFORMATIVE)

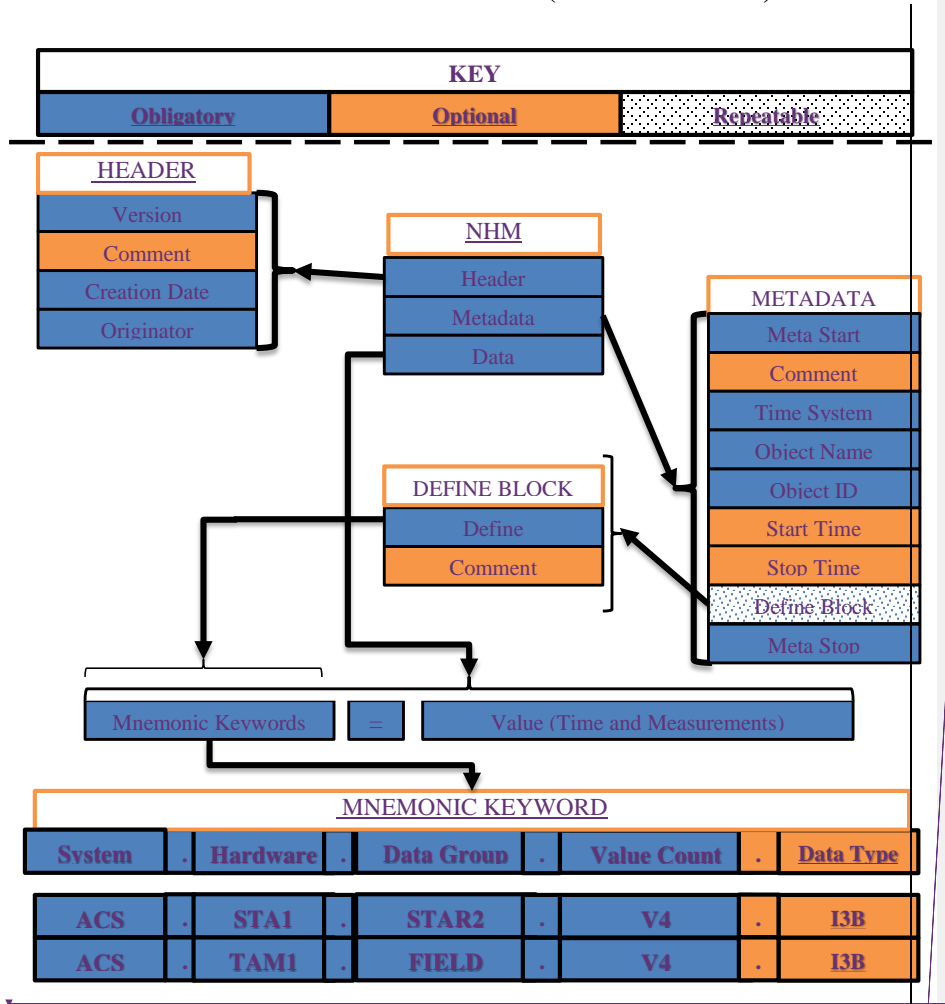

Deleted: \_\_\_\_\_Section Break (Next Page)\_\_\_\_\_